


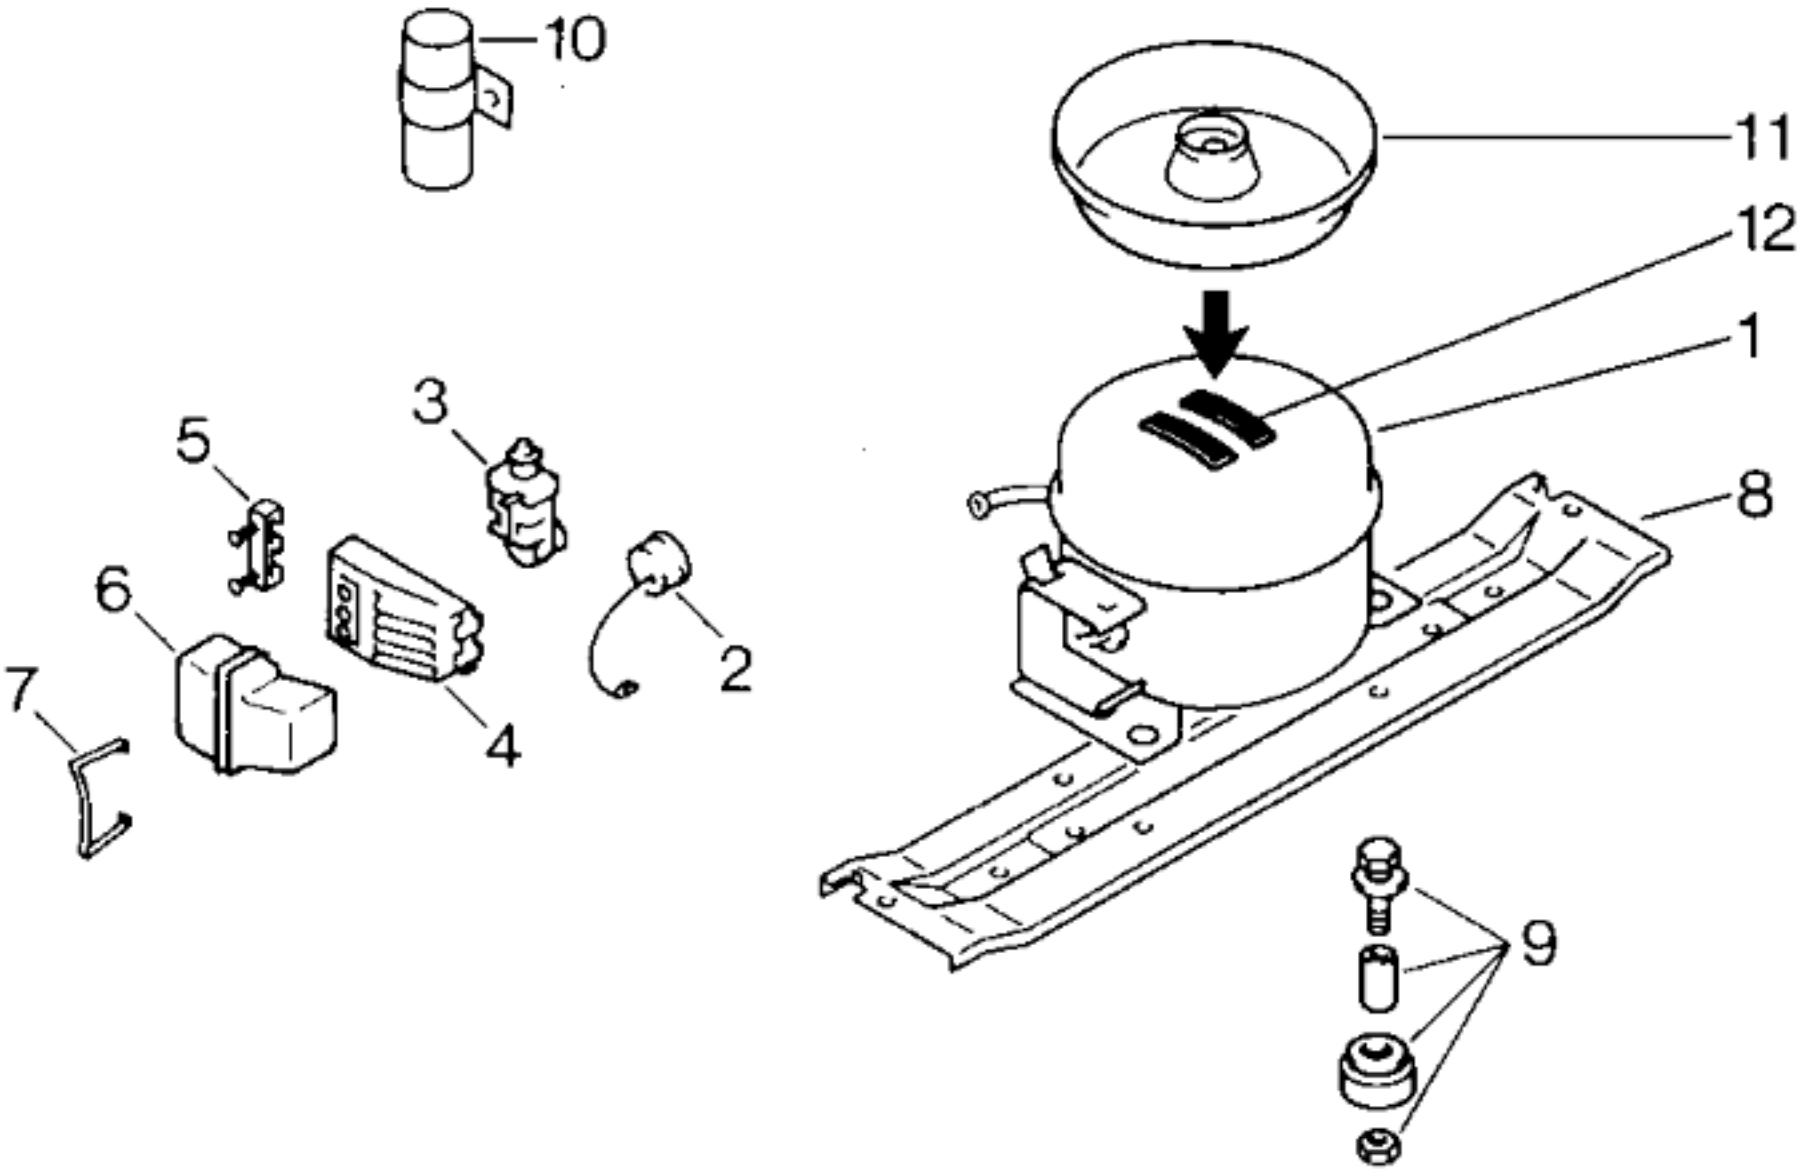

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		Matsushita
Typ/Type		FR 10 A		D119LRAA
Förderleistung/Delivery/Débit	l/h	1629		1384
Anlaufstrom/Starting current/Cour. de démarrage	A	11,4		9,6
Widerstand/Resistance/Résistance	Ha/main/prin.	10,7		11,0
	Hi/aux	13,0		26,7
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		077 B2054		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ °C	-24	-16	
Valeurs de commutation	„aus“	-34	-24	
	(„abtauen“ od.) „alarm“	-19	-12	
Fullmenge/Fill.quantity/Charge	R12	g	220	
Anschlußwert/Conn.load/Puiss. connectée		W	190	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Resistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω	190	
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.	EU1,F1	EU2,F2	
	Danfoss	Matsushita	
	FR 10 A	D119LRAA	
1	14 0427	14 0560	
2			
3	02 0108	03 2035	
4			
5	02 1361		
6	05 1413	05 8458	
7		02 6731	
8	11 9114	11 1919	
9	05 0166	05 0166	
10			
11			
12			