


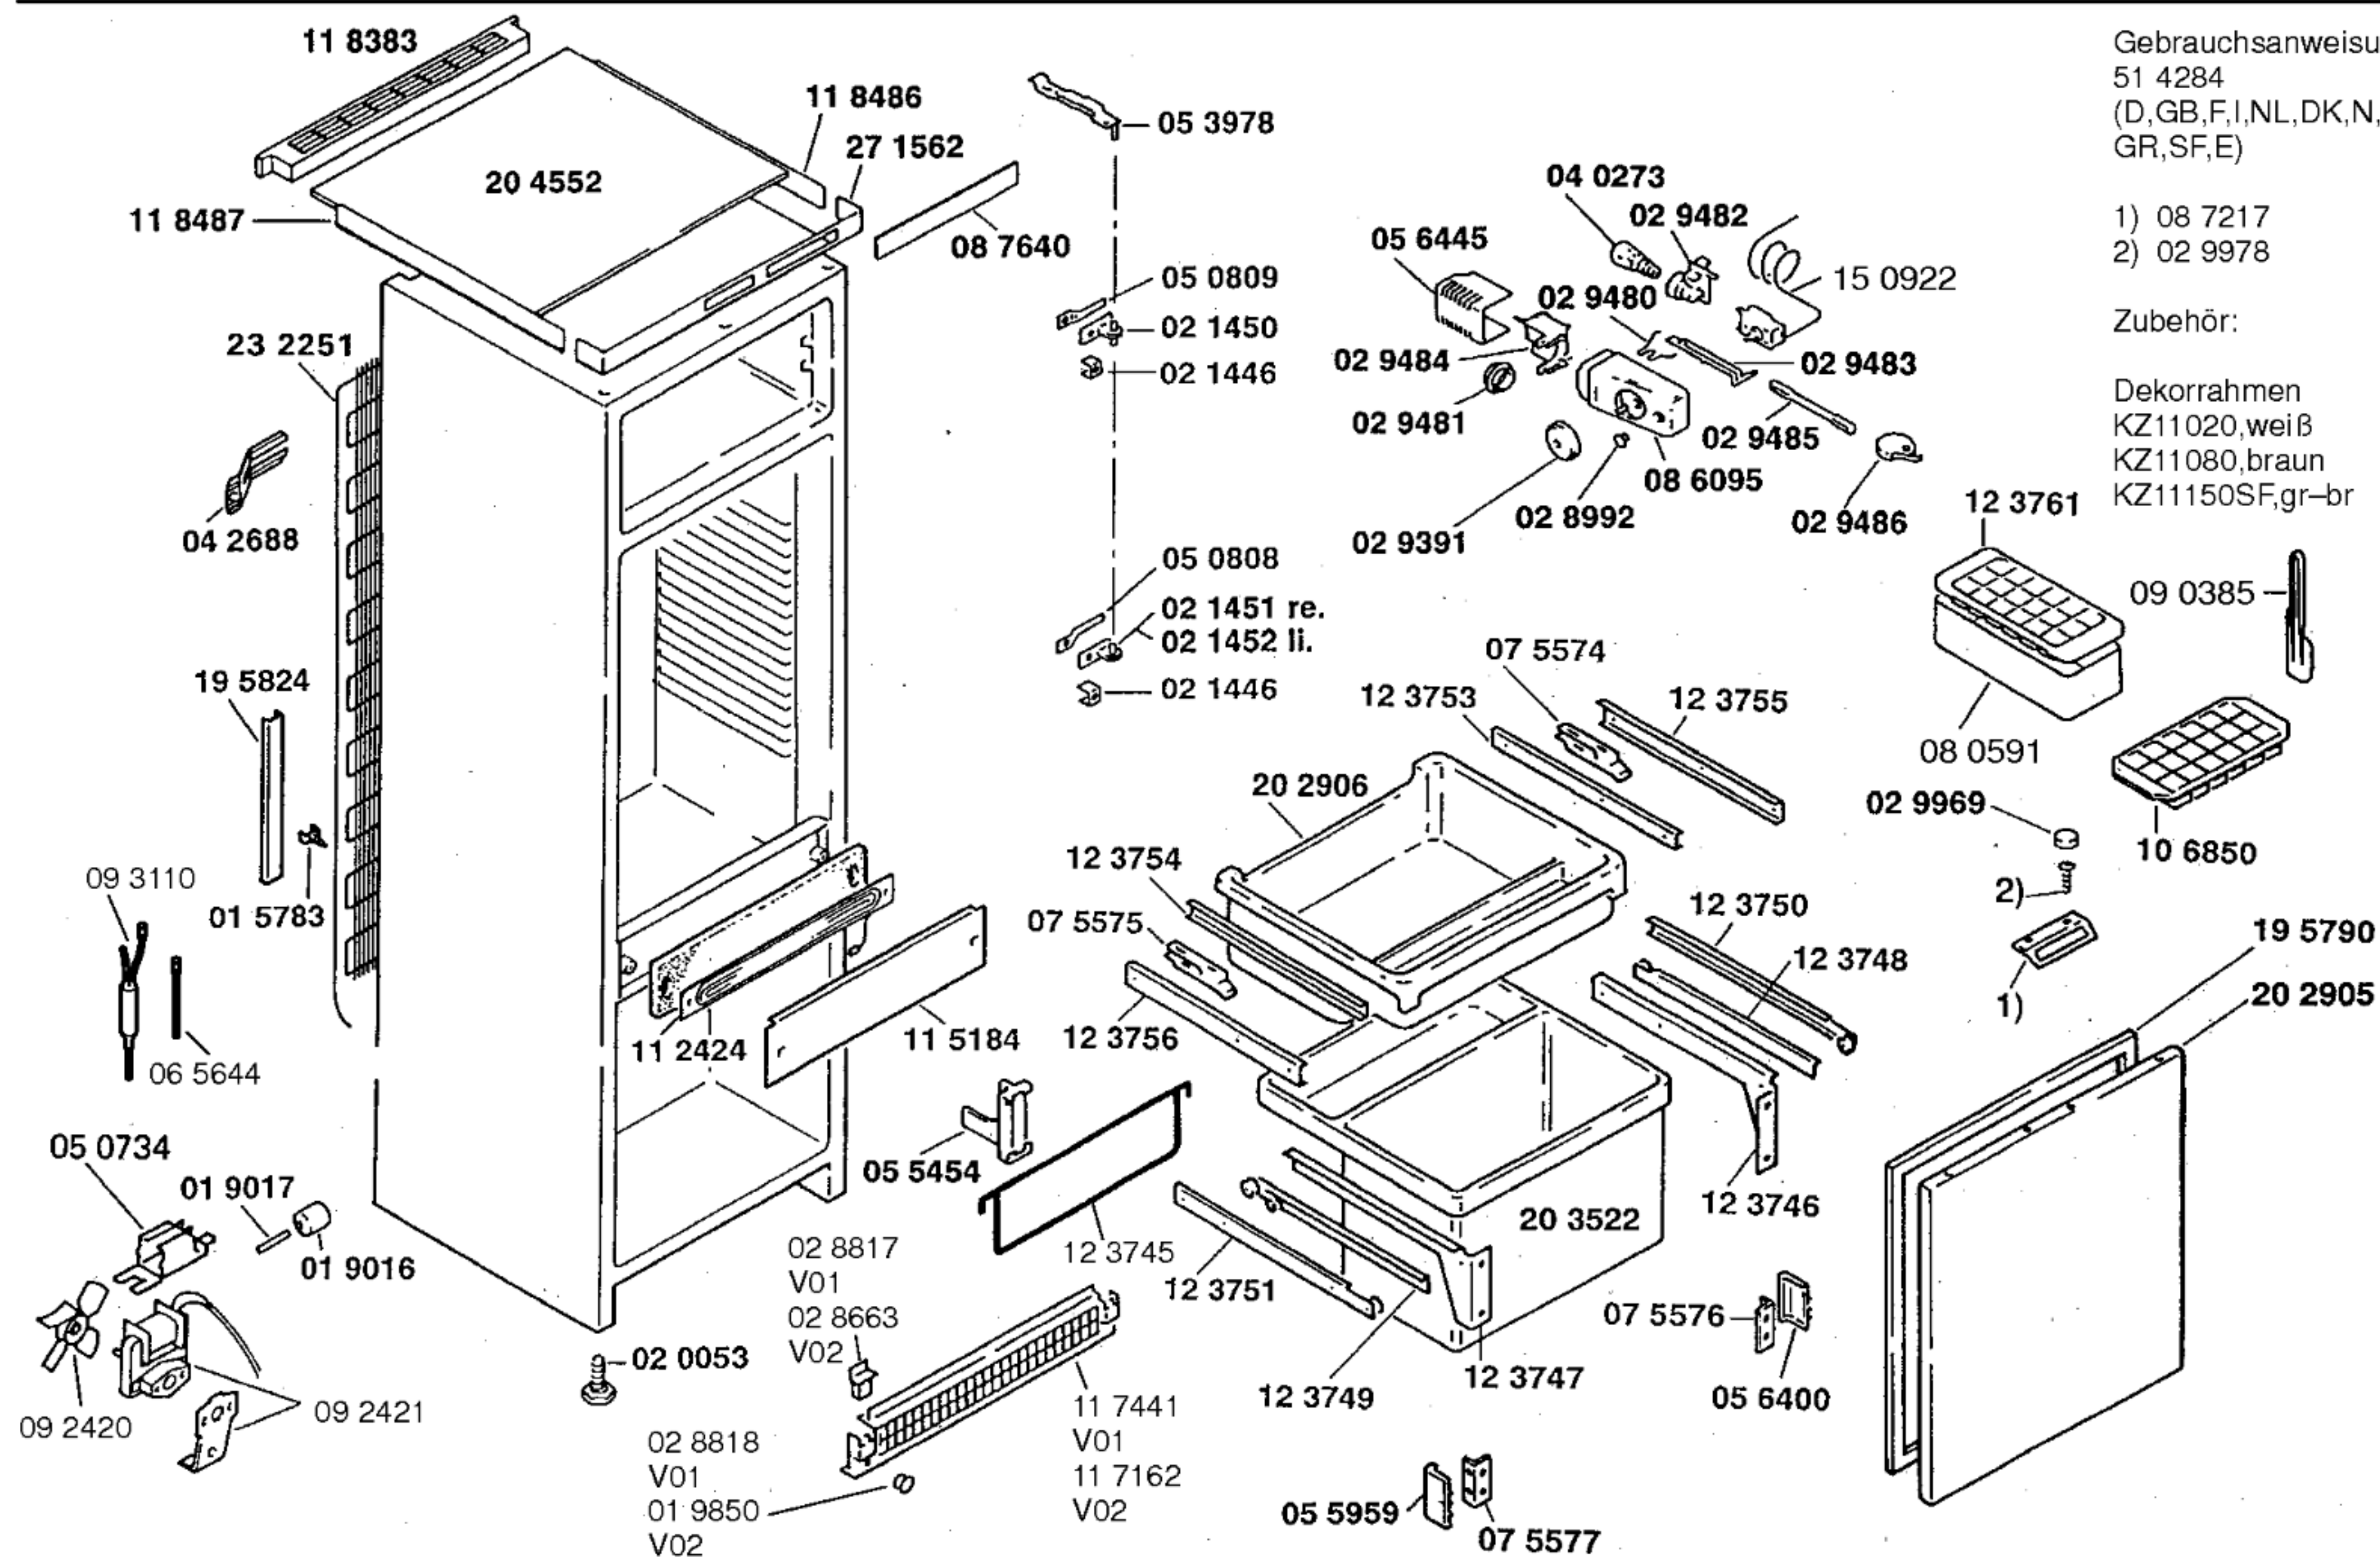



Gebrauchsanweisung
51 4284
(D,GB,F,I,NL,DK,N,S,
GR,SF,E)

1) 08 7217
2) 02 9978

Zubehör:

Dekorrahmen
KZ11020,weiß
KZ11080,braun
KZ11150SF,gr-br

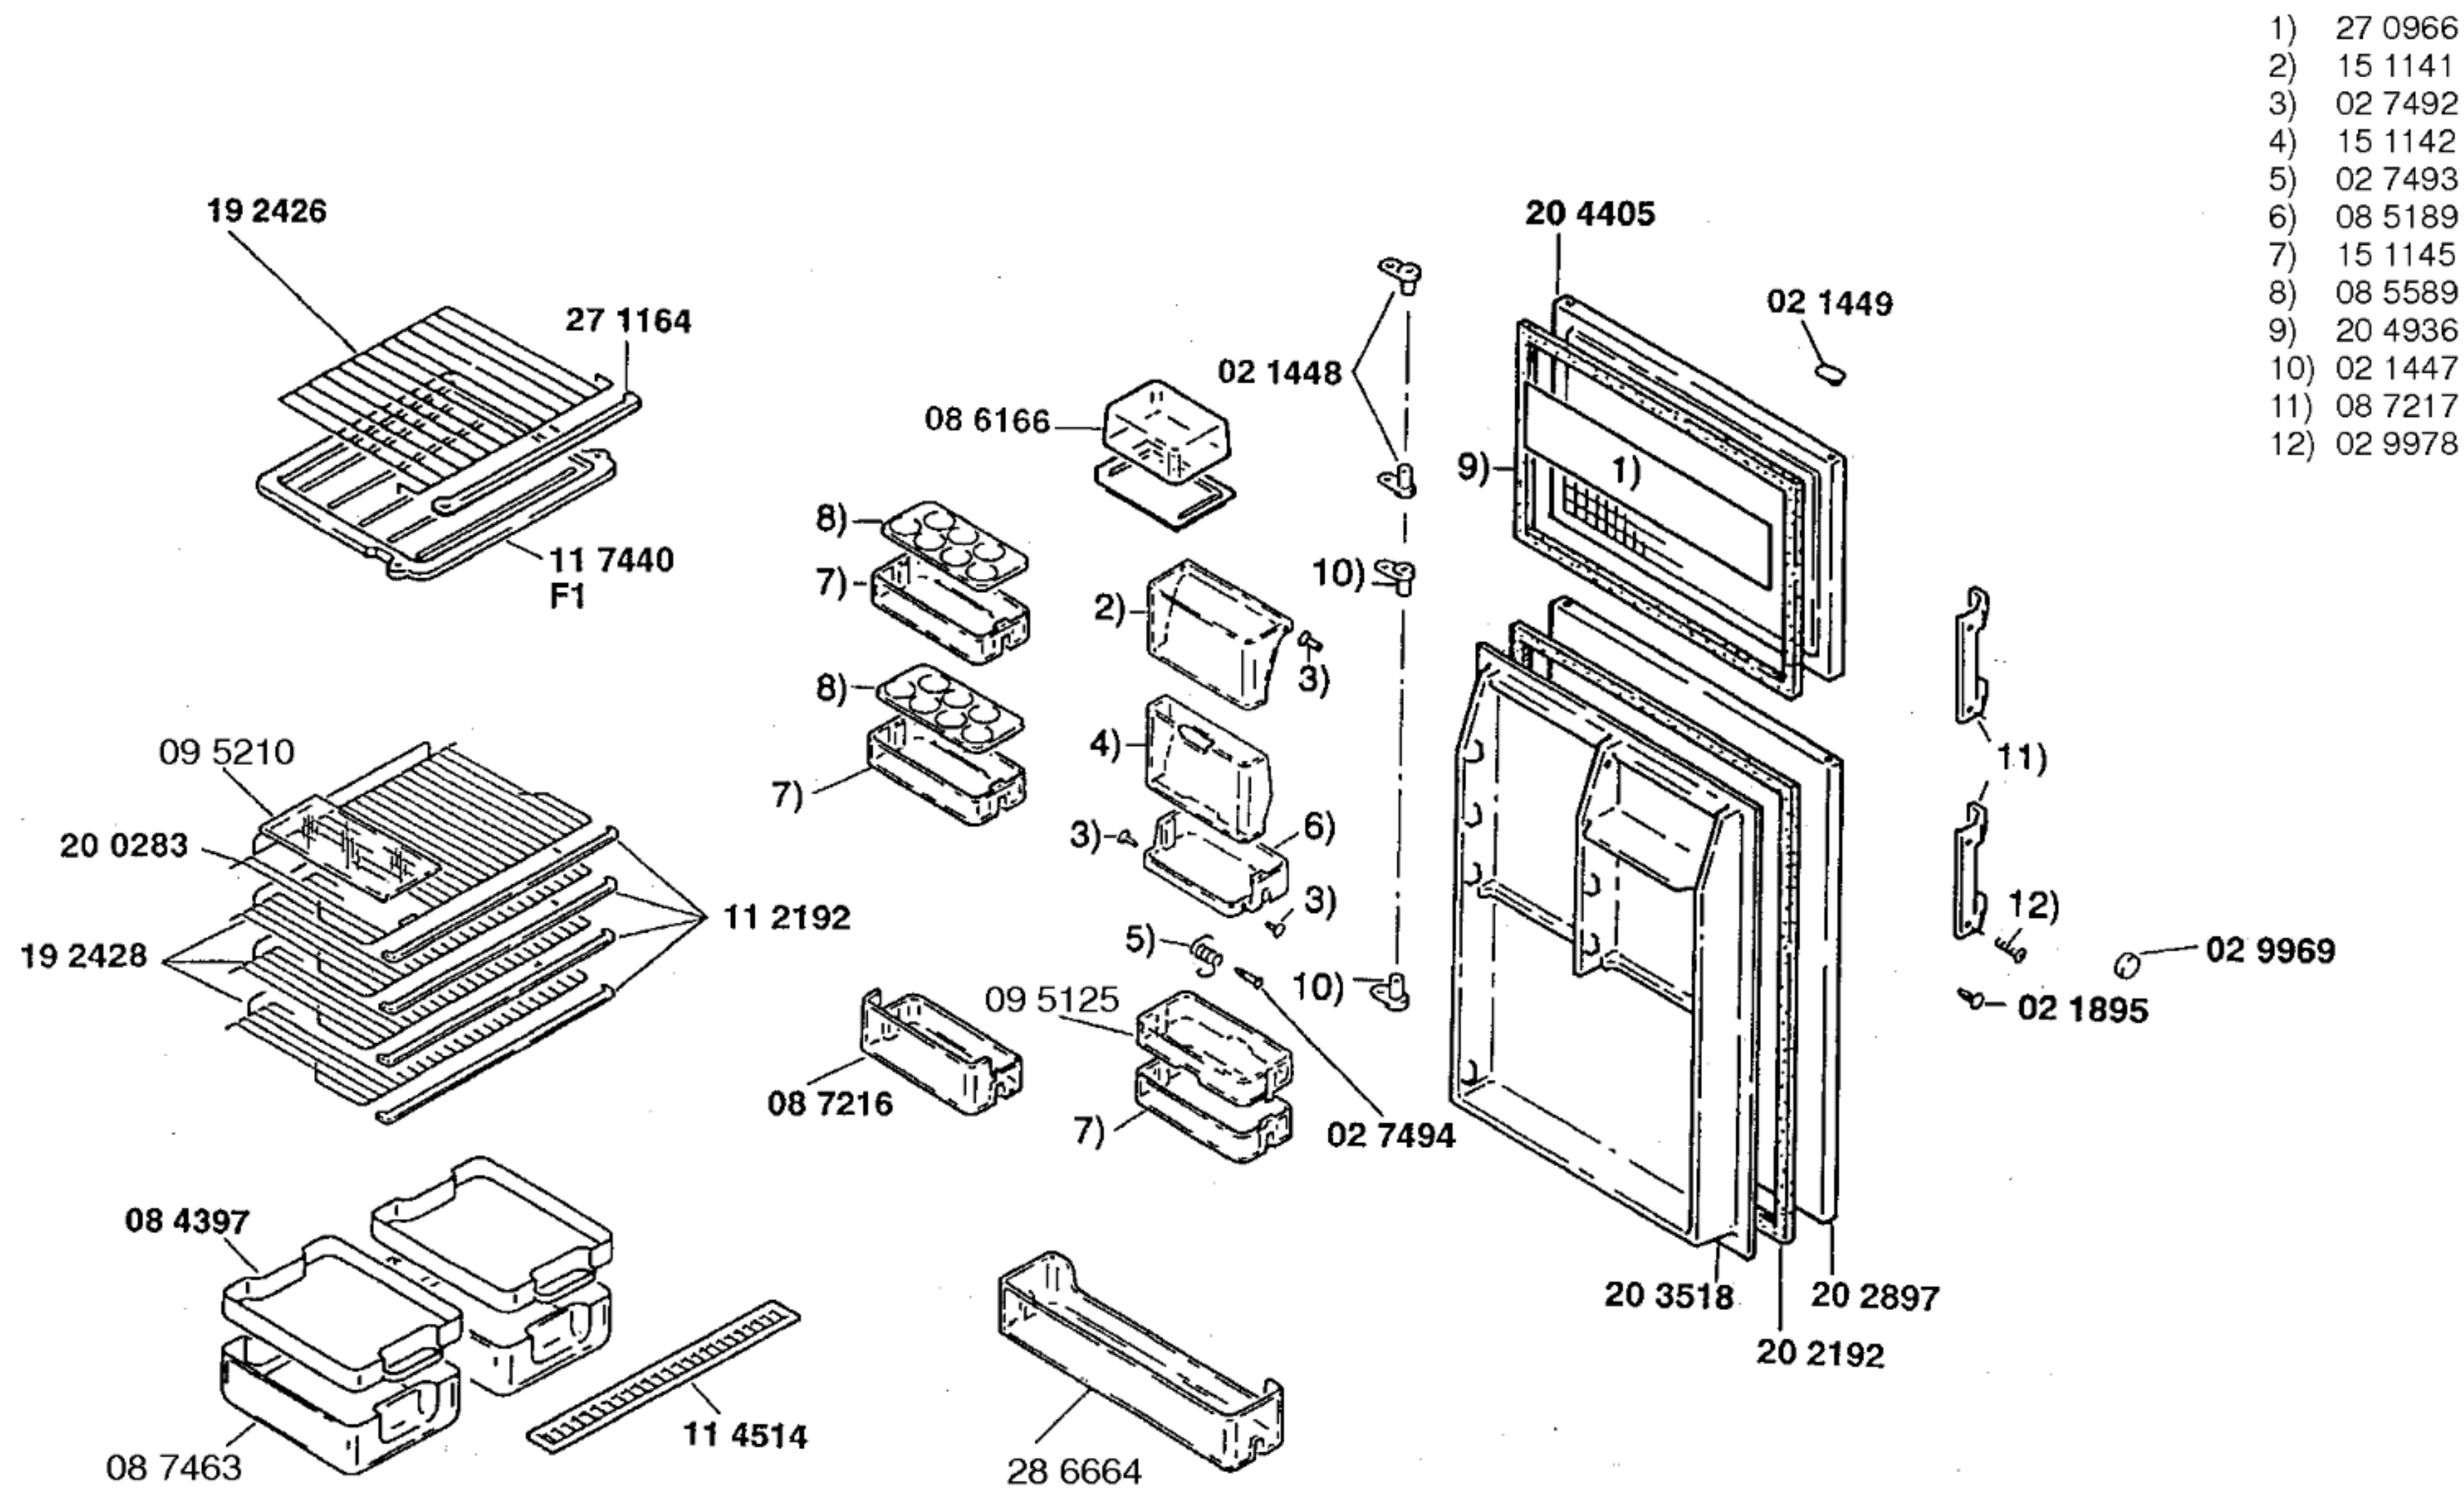

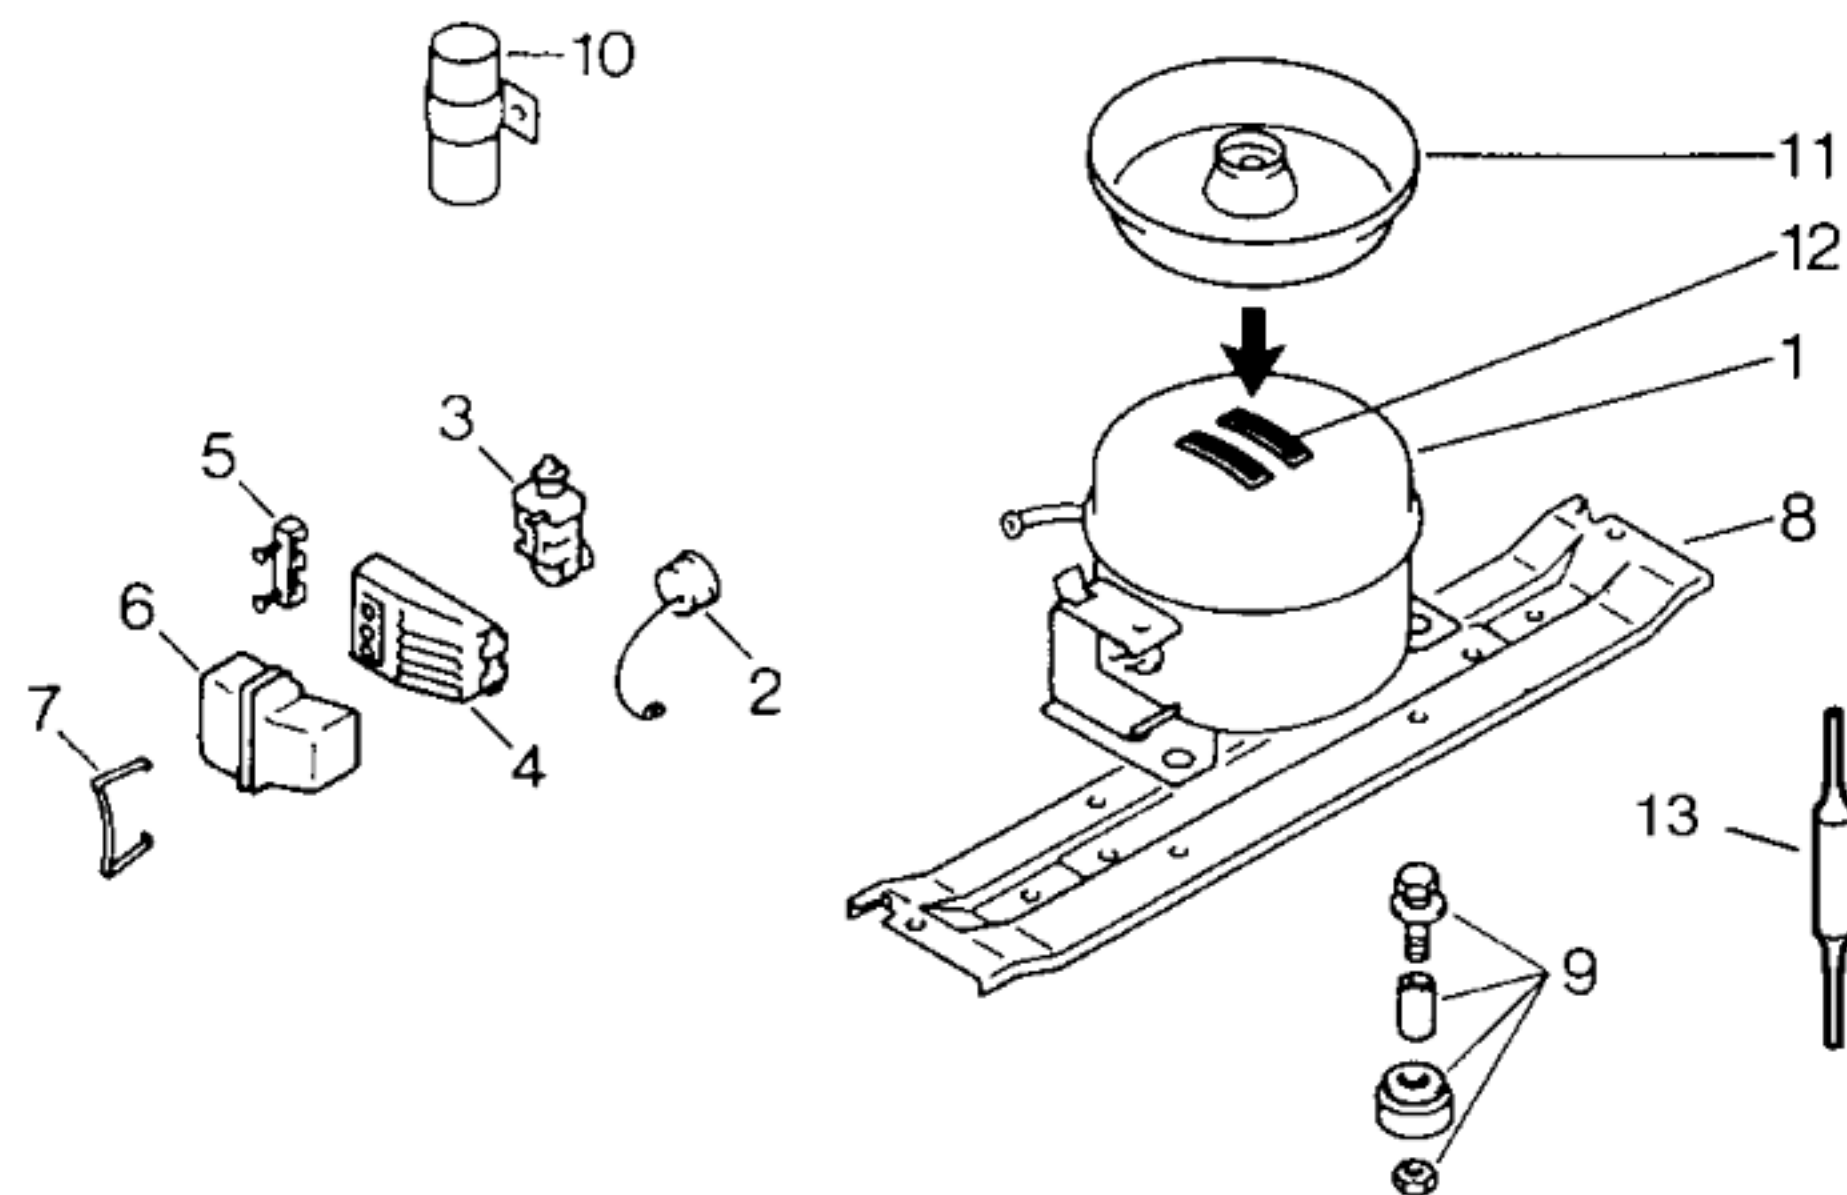

Pos.	Matsushita		
	D91C18RAW5		
1	14 1245		
2			
3	03 2035		
4			
5			
6	05 8458		
7	02 6731		
8	11 1919		
9	05 0166		
10			
11	08 5182		
12	05 6008		
13	35 0026		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		D91C18RAW5		
Förderleistung/Delivery/Débit		l/h	1633	
Anlaufstrom/Starting current/Cour de démarrage		A	10,9	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	8,5	
		Hi/aux Ω	21,1	
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/ Valeurs de commutation		„ein“ $^{\circ}\text{C}$	+4,5	+4,5
		„aus“ („abtauen“ od.) „alarm“	-31,0	-13,5
Füllmenge/Fill.quantity/Charge		R134a	g	220
Anschlußwert/Conn.load/Puiss. connectée		W	150	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω	8800 $\pm$ 530	
Leistung/Power/Puissance		W	5	
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω	285 $\pm$ 28	
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		