


**BOSCH**

KTL1743/01-V01  
KTL1743/02-V02  
KTL1743FF/01-V03  
KTL1743FF/02-V04

KTL1743GB/01-V05  
KTL1743GB/02-V06

KÜHL-, GEFRIERGERÄTE  
Kühlschränke, Tisch

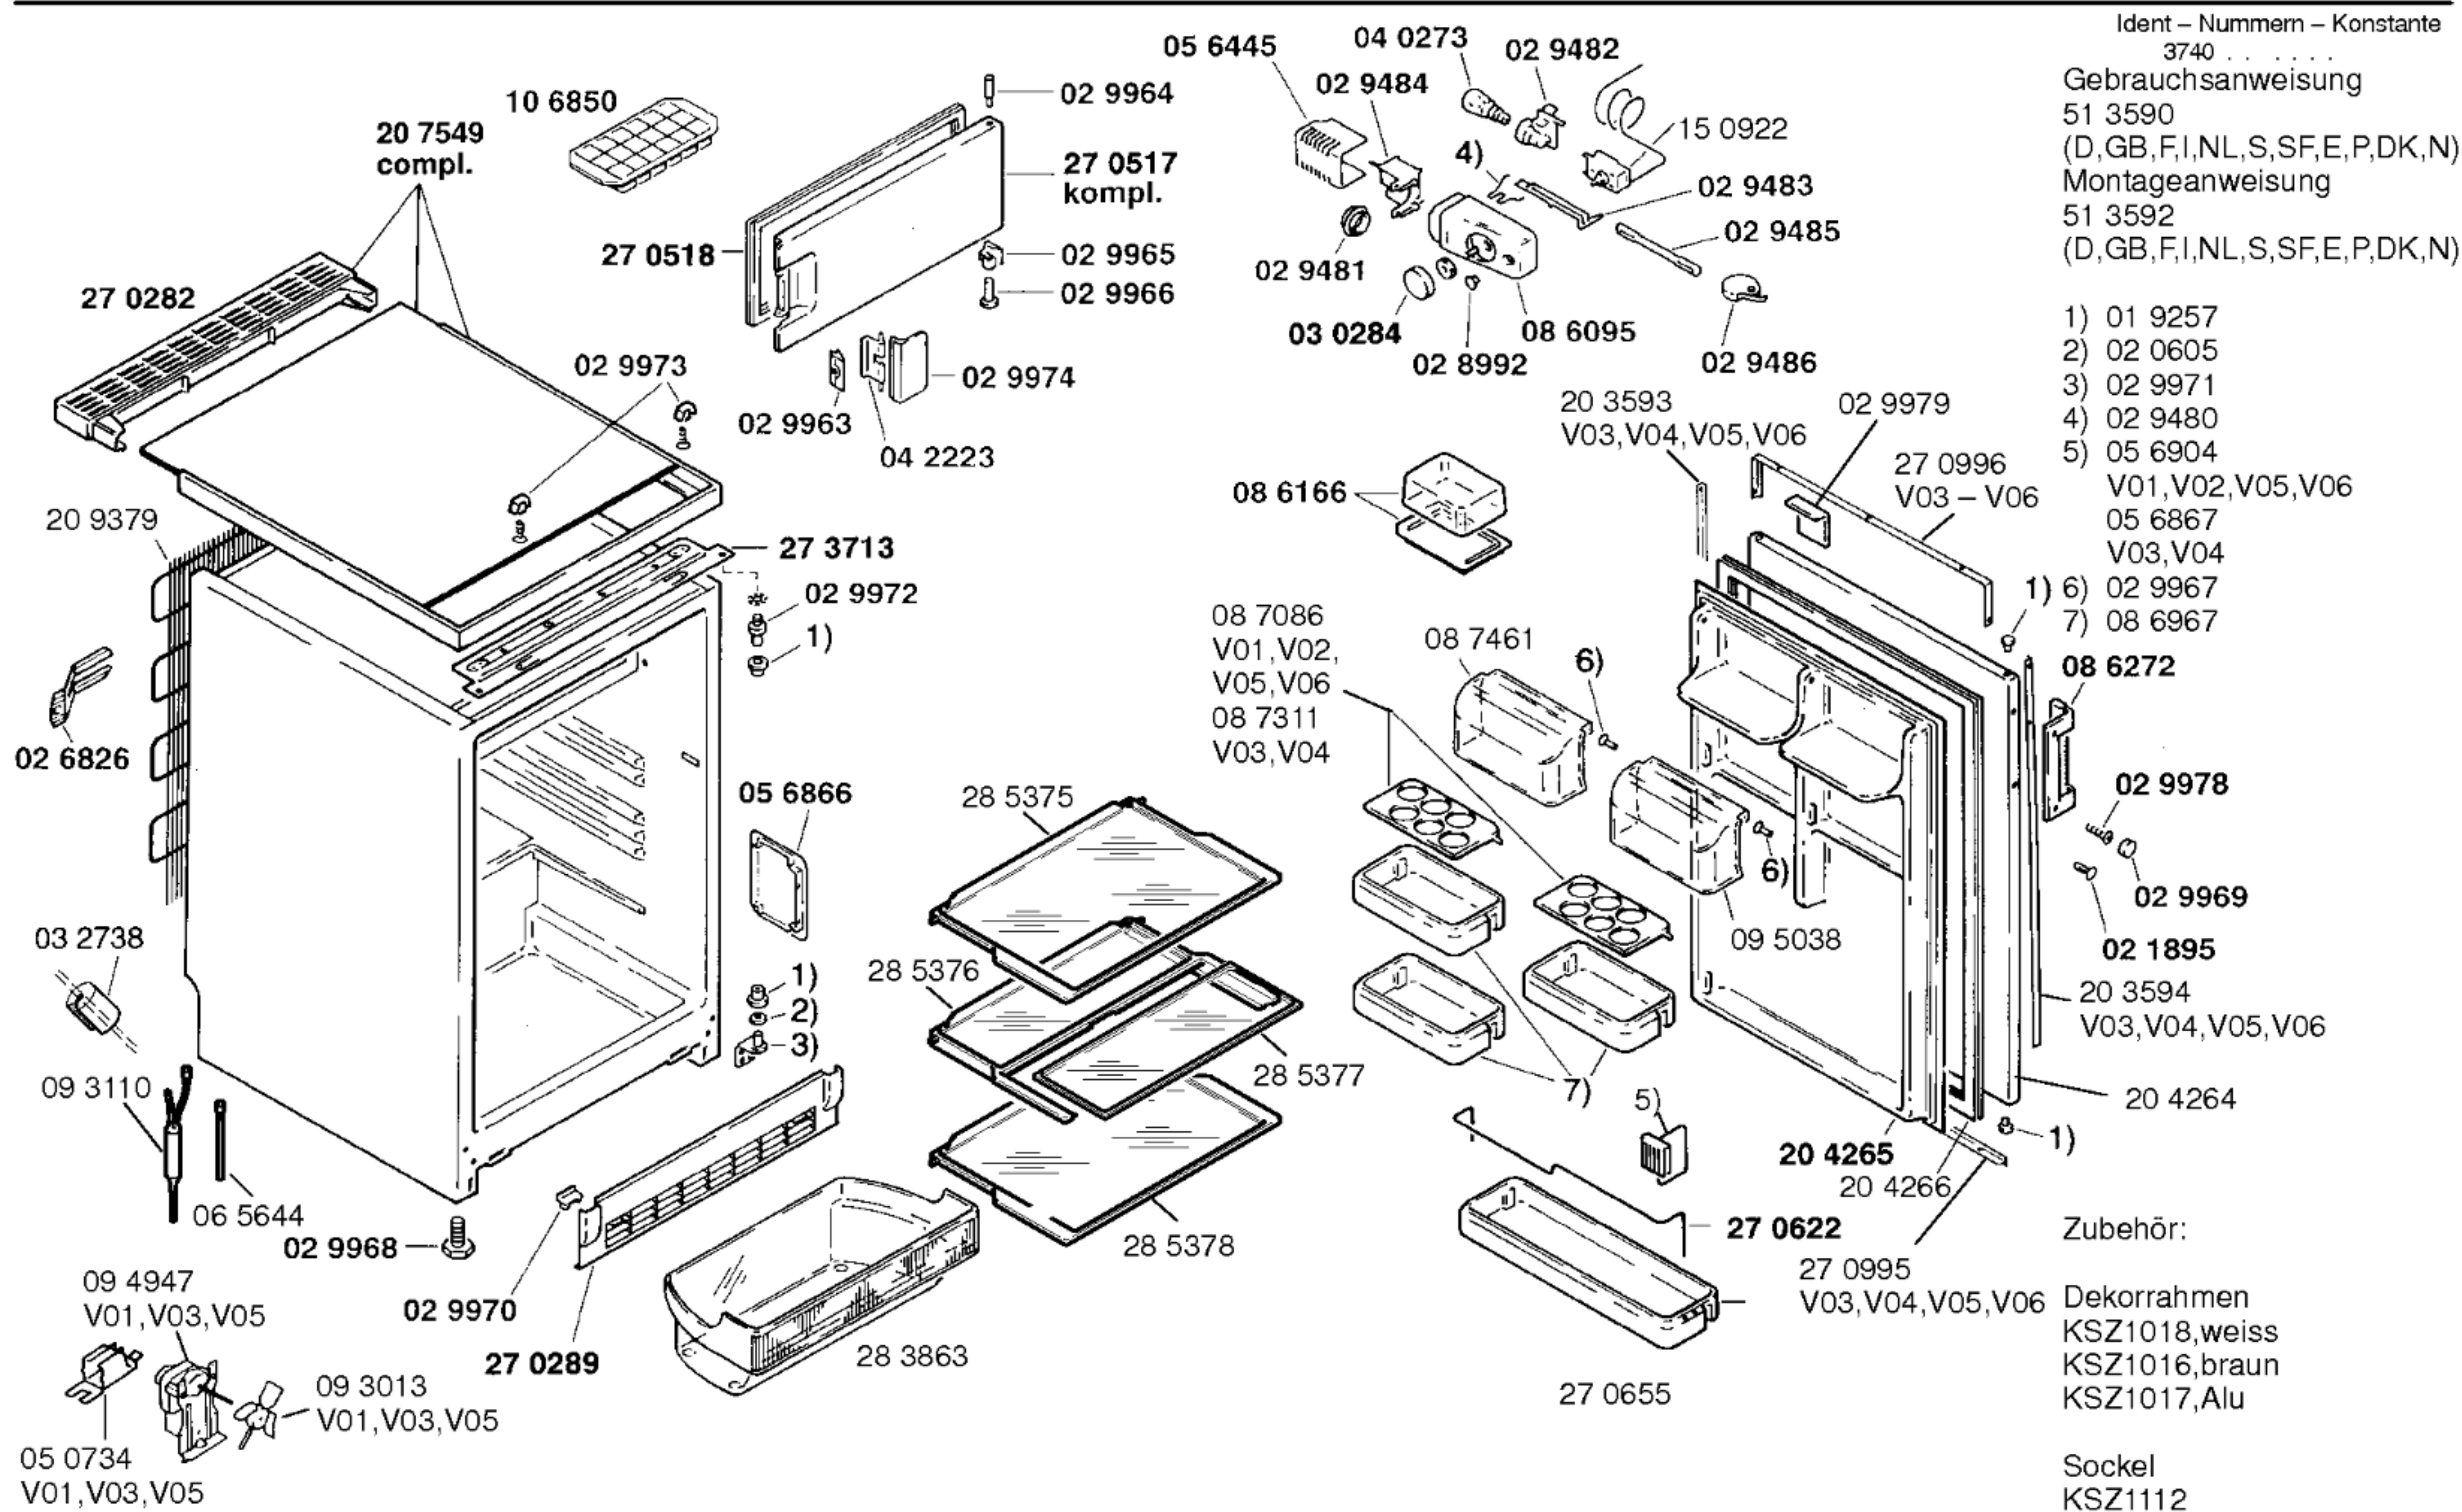


**BOSCH**

KTL1743/01-V01  
KTL1743/02-V02  
KTL1743FF/01-V03  
KTL1743FF/02-V04

KTL1743GB/01-V05  
KTL1743GB/02-V06

KÜHL-, GEFRIERGERÄTE  
Kühlschränke, Tisch

Ident – Nummern – Konstante  
3740 . . . . .

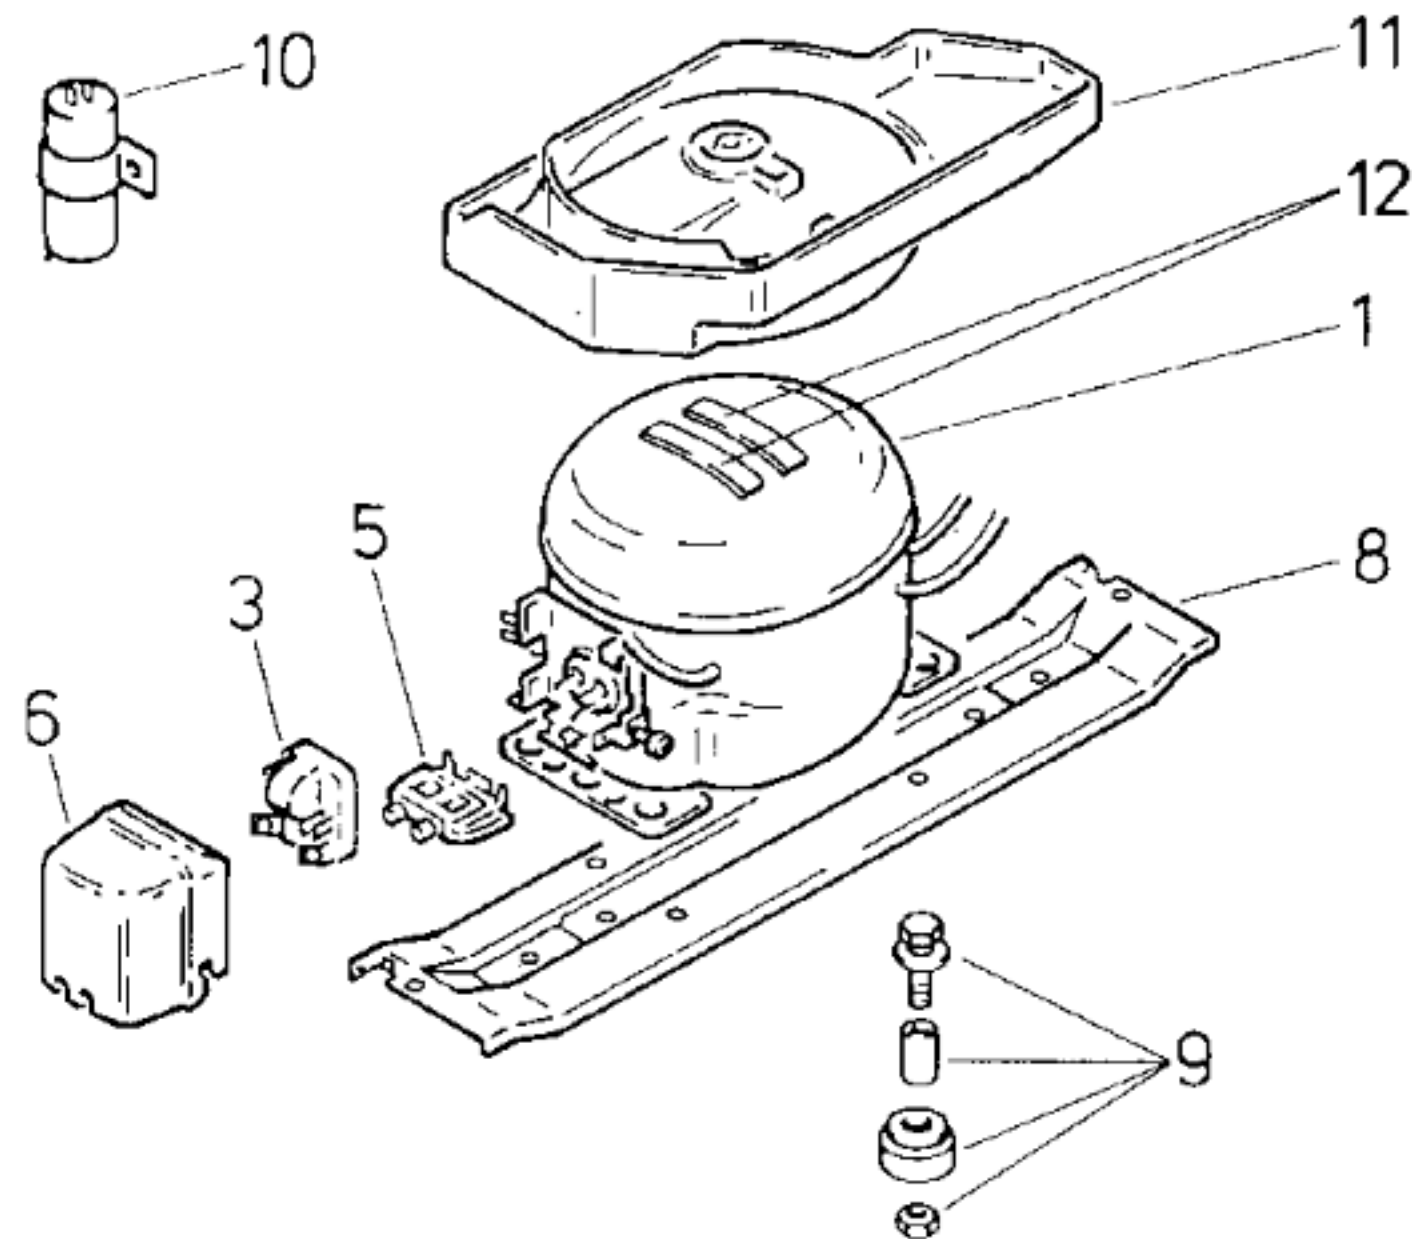

| Pos. | V01, V03, V05 | V02, V04, V06 |  |
|------|---------------|---------------|--|
|      | Danfoss       | Danfoss       |  |
| 1    | TLES 7 K      | TLES 9 K      |  |
| 2    | 14 1239       | 14 1308       |  |
| 3    |               |               |  |
| 4    | 15 1055       | 15 1055       |  |
| 5    |               |               |  |
| 6    | 15 0760       | 15 0760       |  |
| 7    | 15 1072       | 15 1072       |  |
| 8    |               |               |  |
| 9    | 27 1375       | 27 1375       |  |
| 10   | 05 0166       | 05 0166       |  |
| 11   |               |               |  |
| 12   | 08 4744       | 08 4744       |  |
|      | 05 6008       | 05 6008       |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |               |          |       |
|--------------------------------------------------------|---------------|----------|-------|
| Verdichter/Compressor/Compresseur                      |               | Danfoss  |       |
| Typ/Type                                               |               | TLES 7 K |       |
| Förderleistung/Delivery/Débit                          | l/h           | 1168     |       |
| Anlaufstrom/Starting current/Cour de démarrage         | A             | 4,5      |       |
| Widerstand/Resistance/Résistance                       | Ha/main/prin. | Ω        | 16,5  |
|                                                        | Hi/aux        | Ω        | 16,9  |
| Temp.-Regler/Thermostat                                |               | Dan      |       |
| Typ/Type                                               |               |          |       |
| Reglerstellung/Position                                |               | kalt     | warm  |
| Schaltwerte/Switching values/                          | „ein“         | +4,5     | +4,5  |
| Valeurs de commutation                                 | „aus“         | –31,0    | –13,5 |
| („abtauen“ od.)                                        | „alarm“       |          |       |
| Füllmenge/Fill.quantity/Charge                         | R600a         | g        | 1)    |
| Anschlußwert/Conn.load/Puiss. connectée                | W             | 79       |       |
| Heizung/Heater/Chauffage                               |               |          |       |
| Widerstand/Resistance/Résistance                       | Ω             |          |       |
| Leistung/Power/Puissance                               | W             |          |       |
| Ventilator/Blower/Ventilateur                          |               |          |       |
| Widerstand/Resistance/Résistance                       | Ω             |          |       |
| Schaltuhr/Timer/Minuterie de contact                   |               |          |       |
| Widerstand/Resistance/Résistance                       | Ω             |          |       |
| Magnetventil/Magnetic valve/Electrovanne               |               |          |       |
| Widerstand/Resistance/Résistance                       | Ω             |          |       |
| Spannung/Voltage/Tension                               | V             |          |       |

1) 30  
V01, V03, V05  
28  
V02, V04, V06