


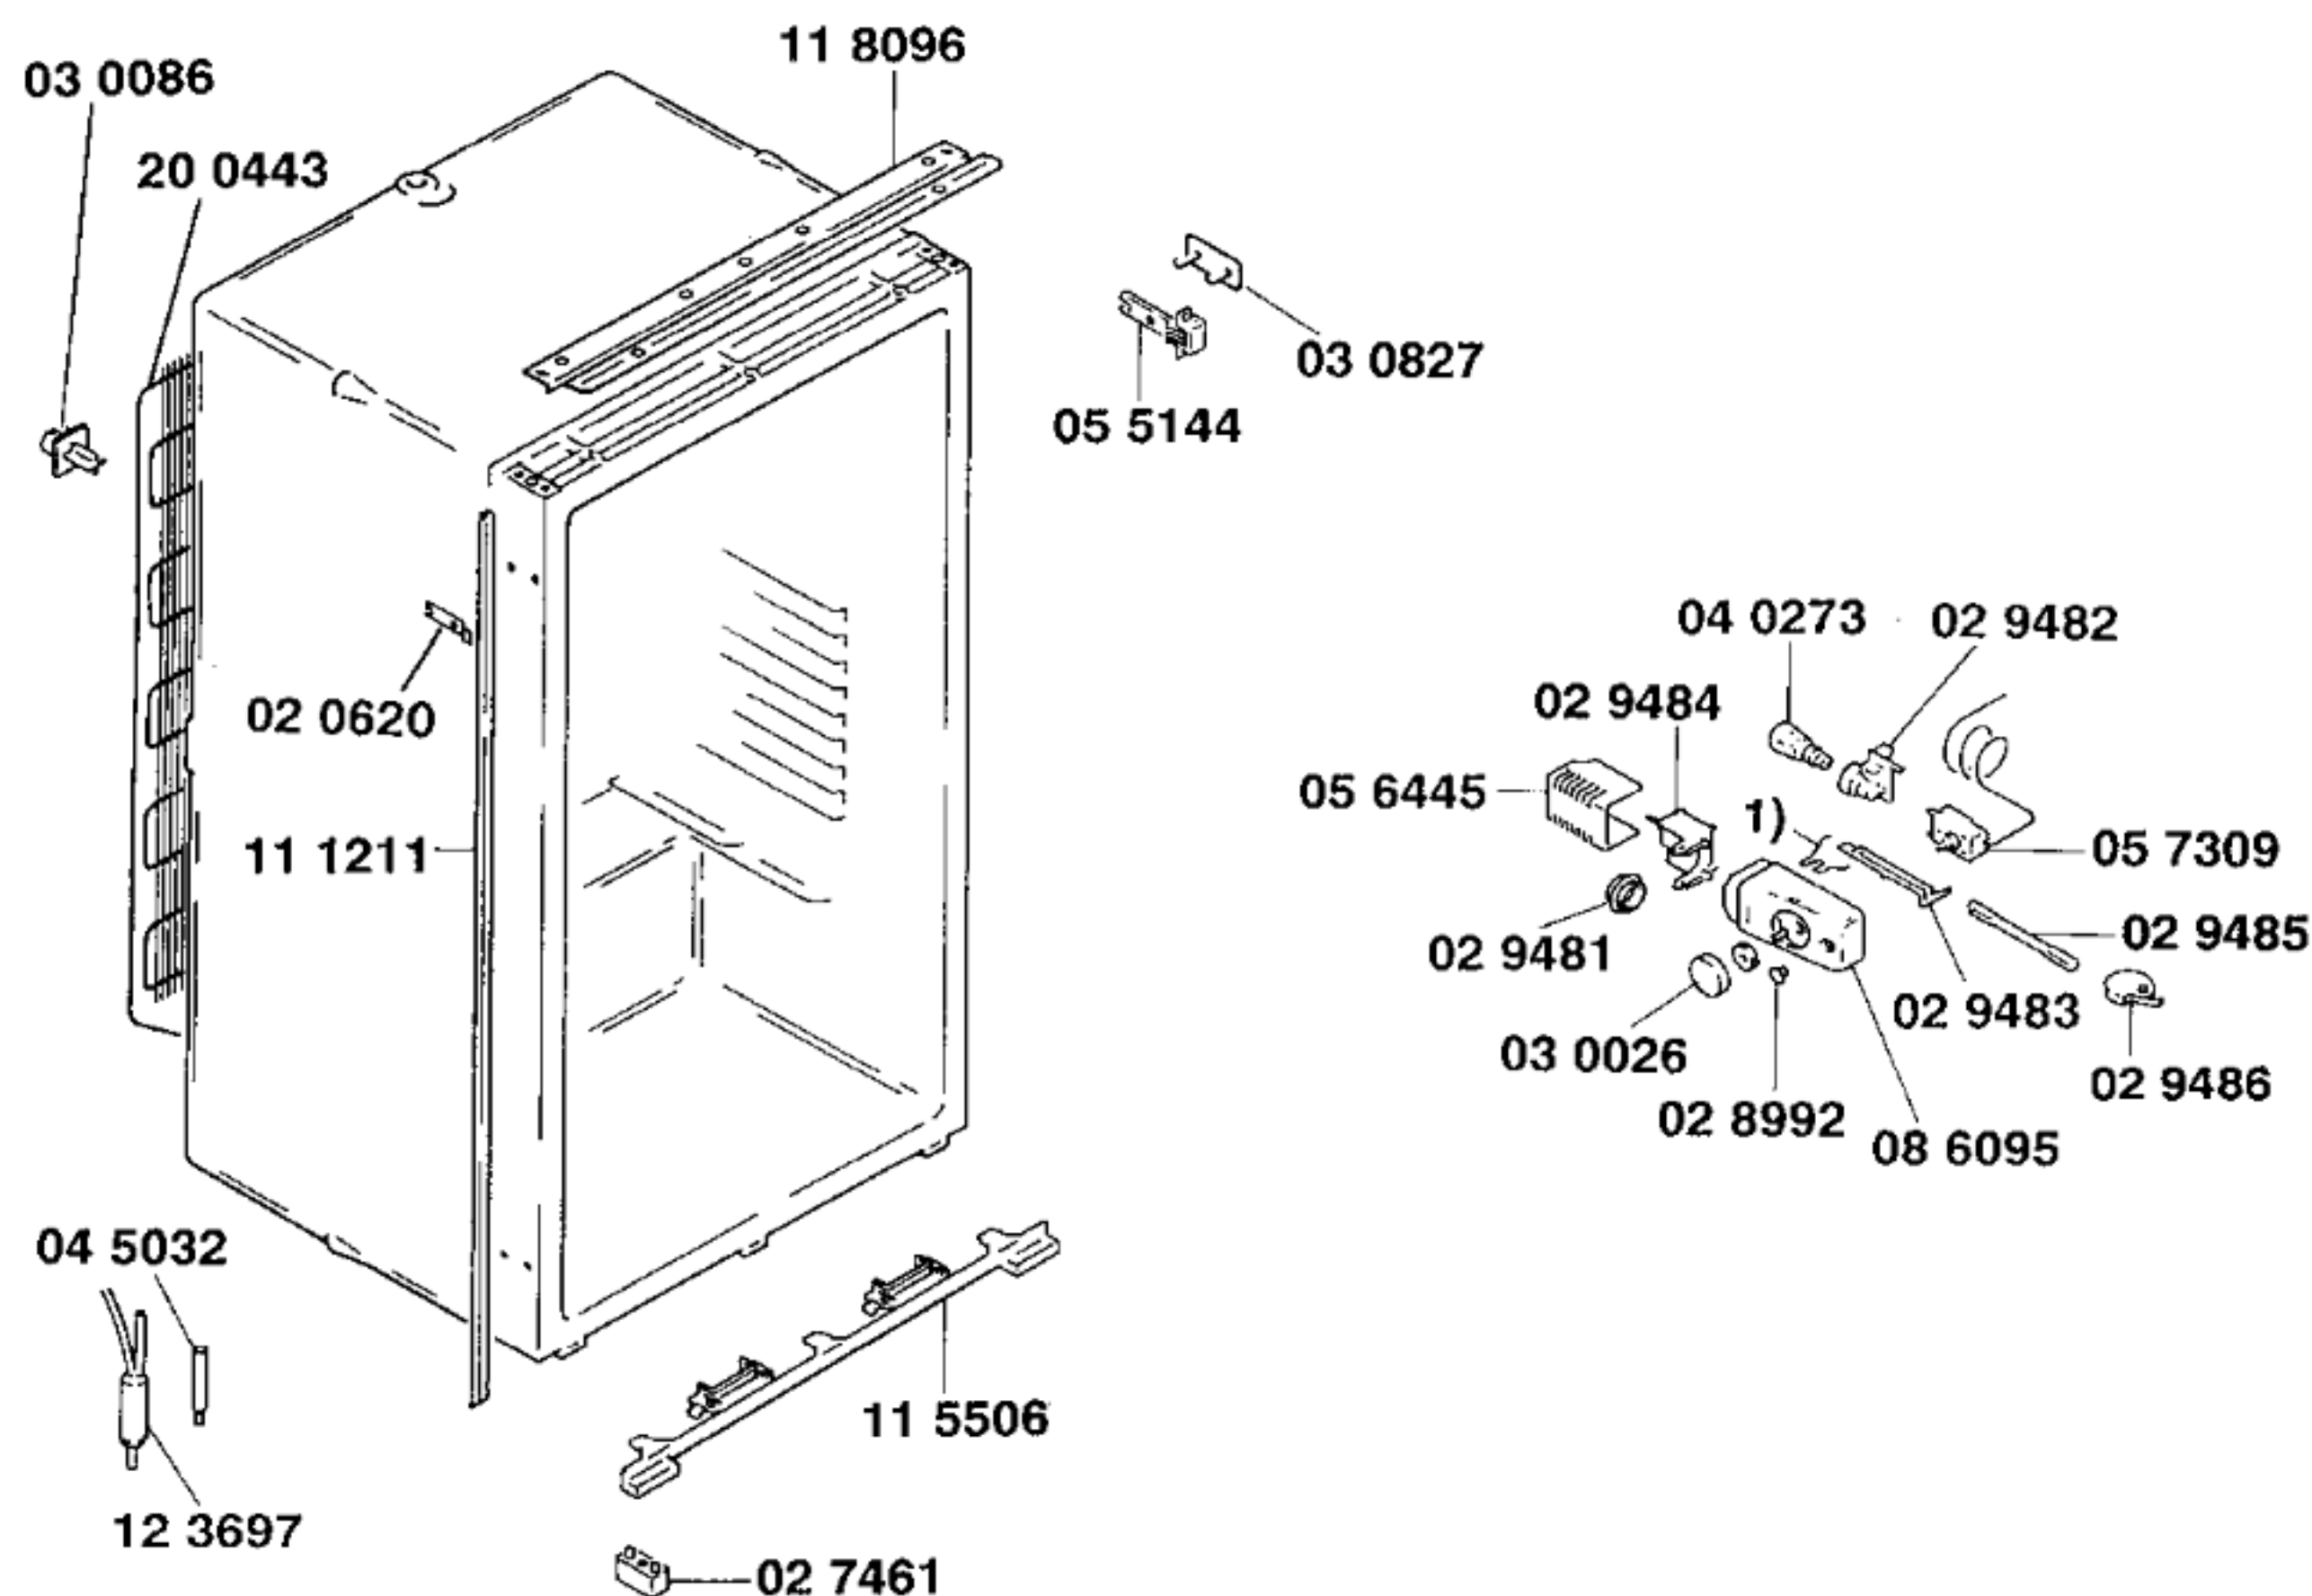

51 3616  
Gebrauchsanweisung  
(D,GB,F,I,NL,DK,S,N,SF,E)  
51 2304  
Montageanleitung  
(D,GB,F,I,NL,DK,N,S,SF,E,P)  
08 4136  
Schraubensatz



1) 02 9480


#### Zubehör:

Dekorrahmen  
KSZ1224, weiss  
KSZ1226, braun

Ausgleichs-  
blenden  
braun:  
KSZ1208, 37mm  
KSZ1209, 41mm  
KSZ1210, 56mm

Alu:  
KSZ1211, 37mm  
KSZ1212, 41mm  
KSZ1213, 56mm

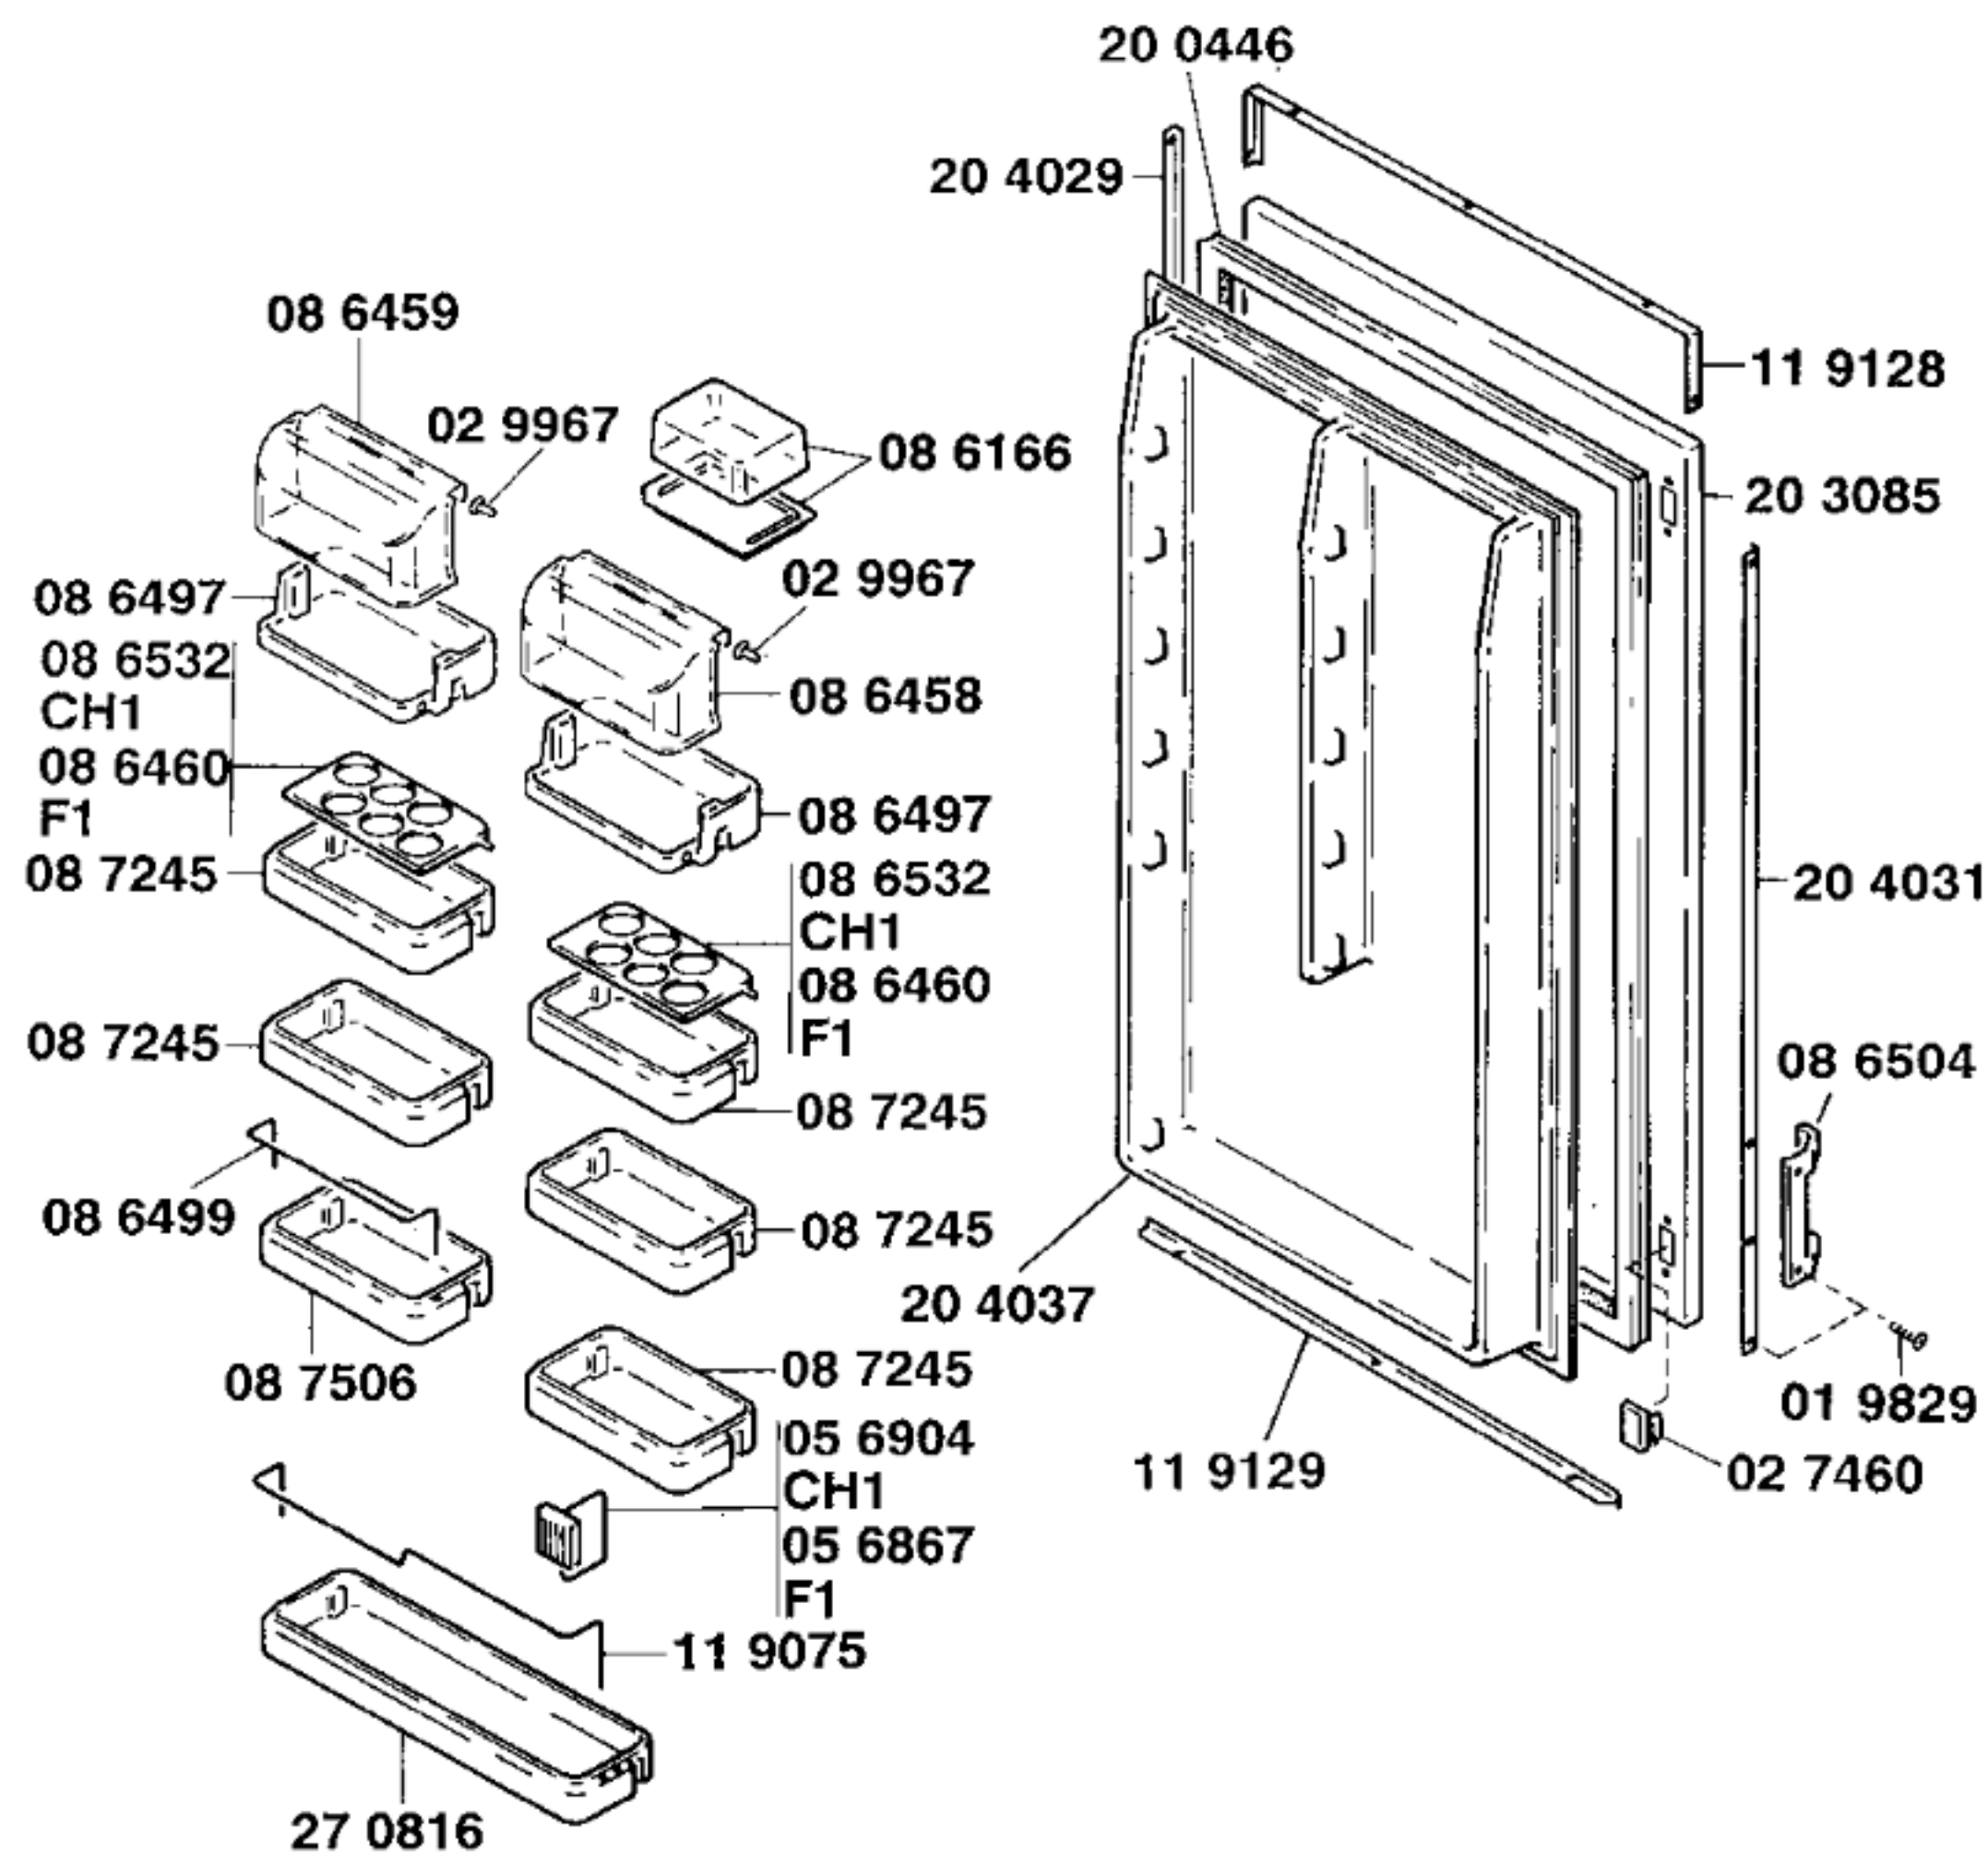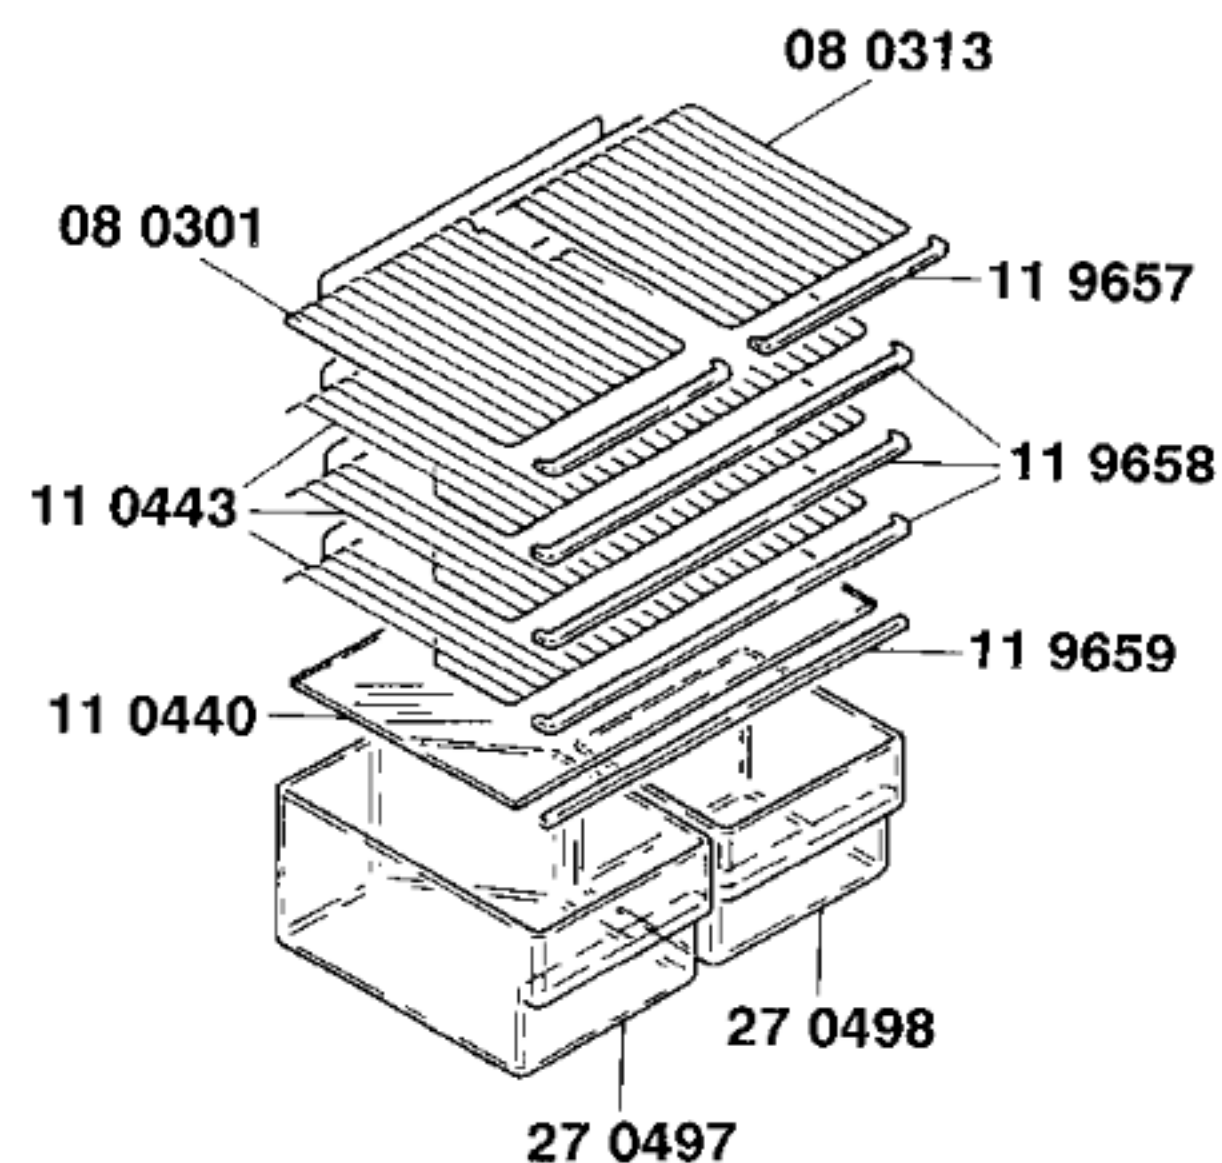

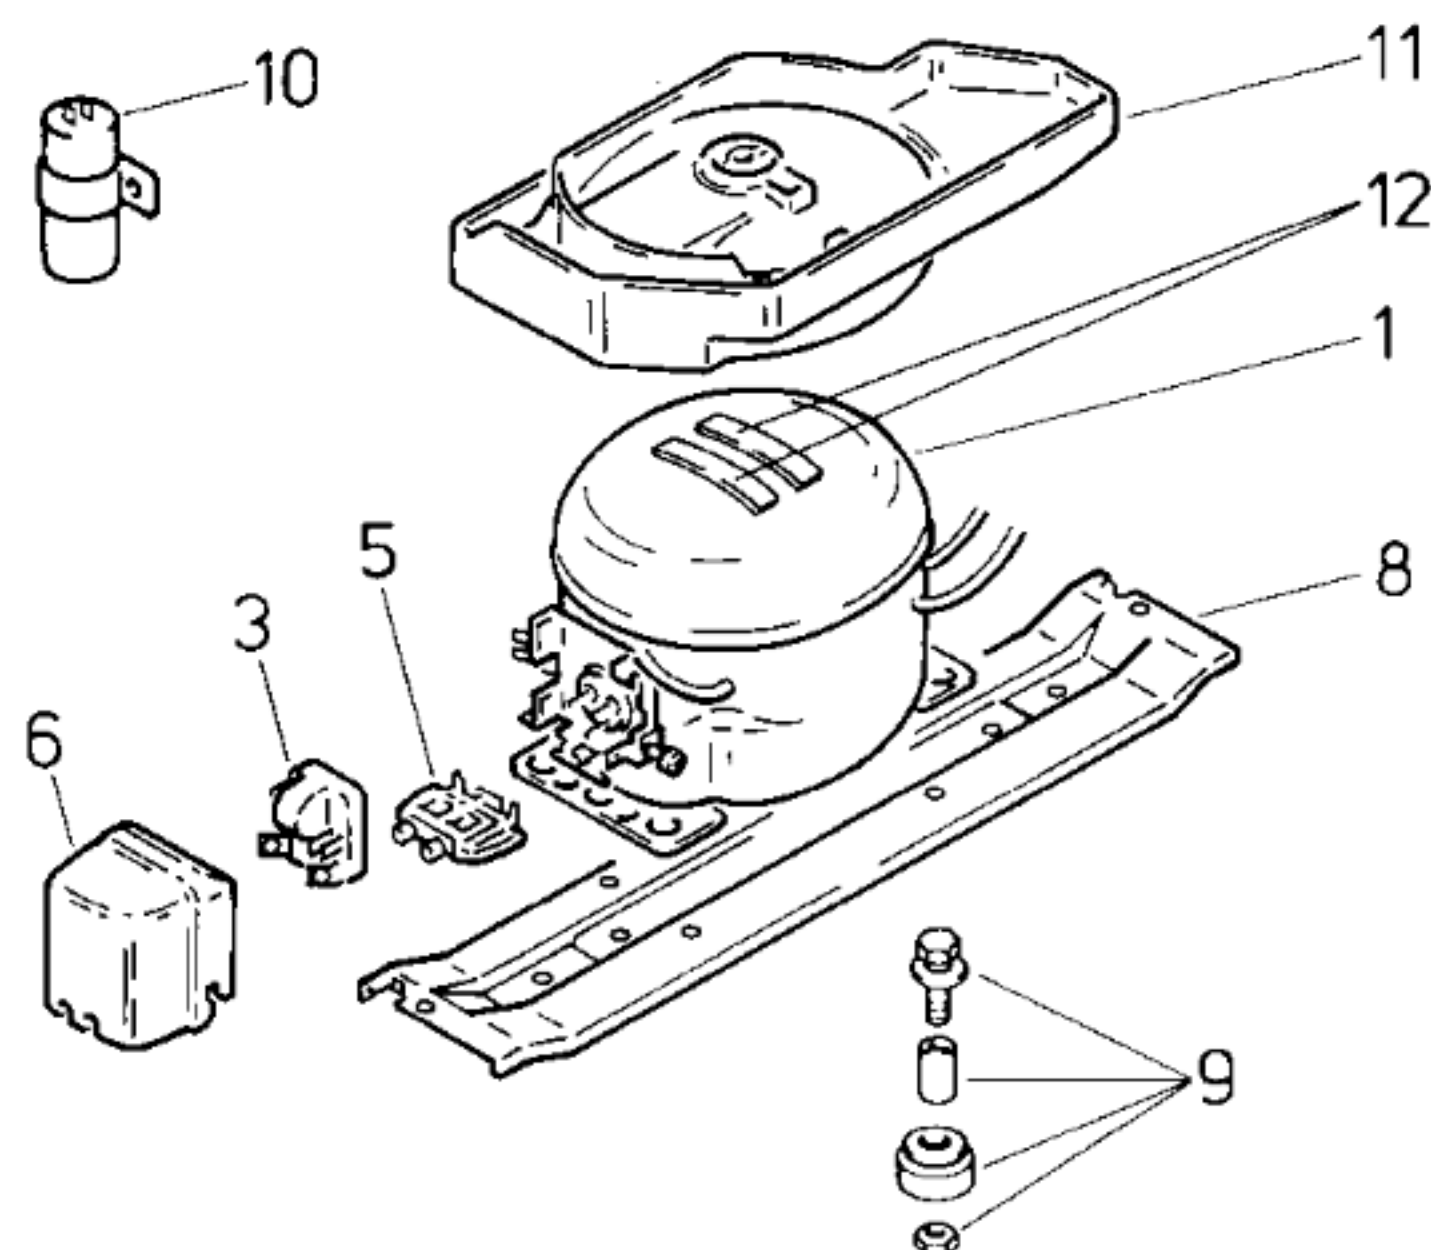Ident-Nummern-Konstante  
3740 .. ....


| Pos. | CH1, F1        |  |  |
|------|----------------|--|--|
|      | <b>Danfoss</b> |  |  |
|      | <b>TL 4 A</b>  |  |  |
| 1    | 13 1064        |  |  |
| 2    |                |  |  |
| 3    | 02 0108        |  |  |
| 4    |                |  |  |
| 5    | 02 7310        |  |  |
| 6    | 05 1413        |  |  |
| 7    |                |  |  |
| 8    | 11 0437        |  |  |
| 9    | 05 0166        |  |  |
| 10   |                |  |  |
| 11   | 08 4744        |  |  |
| 12   | 05 6008        |  |  |

**TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES**

|                                                 |  |                        |         |    |
|-------------------------------------------------|--|------------------------|---------|----|
| Verdichter/Compressor/Compresseur               |  | Danfoss                |         |    |
| Typ/Type                                        |  | TL 4 A                 |         |    |
| Förderleistung/Delivery/Débit                   |  | l/h                    | 695     |    |
| Anlaufstrom/Starting current/Cour. de démarrage |  | A                      | 8,3     |    |
| Widerstand/Resistance/Résistance                |  | Ha/main/prin. $\Omega$ | 23,4    |    |
|                                                 |  | Hi/aux $\Omega$        | 15,5    |    |
| Temp.-Regler/Thermostat                         |  | WHF                    |         |    |
| Typ/Type                                        |  | TF 57 F1               |         |    |
| Reglerstellung/Position                         |  | kalt                   | warm    |    |
| Schaltwerte/Switching values/                   |  | + 5                    | + 5     |    |
| Valeurs de commutation                          |  | - 26                   | - 12    |    |
|                                                 |  | („abtauen“ od.)        | „alarm“ |    |
| Füllmenge/Fill.quantity/Charge                  |  | R12                    | g       | 75 |
| Anschlußwert/Conn.load/Puiss. connectée         |  | W                      | 110     |    |
| Heizung/Heater/Chauffage                        |  |                        |         |    |
| Widerstand/Resistance/Resistance                |  | $\Omega$               |         |    |
| Leistung/Power/Puissance                        |  | W                      |         |    |
| Ventilator/Blower/Ventilateur                   |  |                        |         |    |
| Widerstand/Resistance/Résistance                |  | $\Omega$               |         |    |
| Magnetventil/Magnetic valve/Electrovanne        |  |                        |         |    |
| Widerstand/Resistance/Résistance                |  | $\Omega$               |         |    |
| Spannung/Voltage/Tension                        |  | V                      |         |    |