


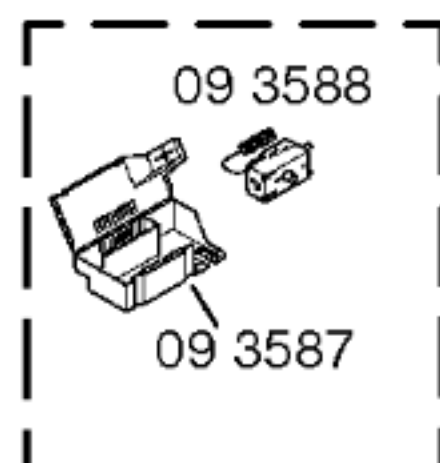


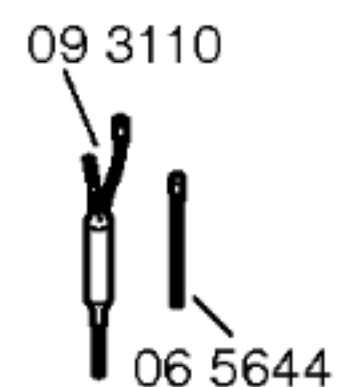



07 4445
 V01-V03
 09 6325
 V04

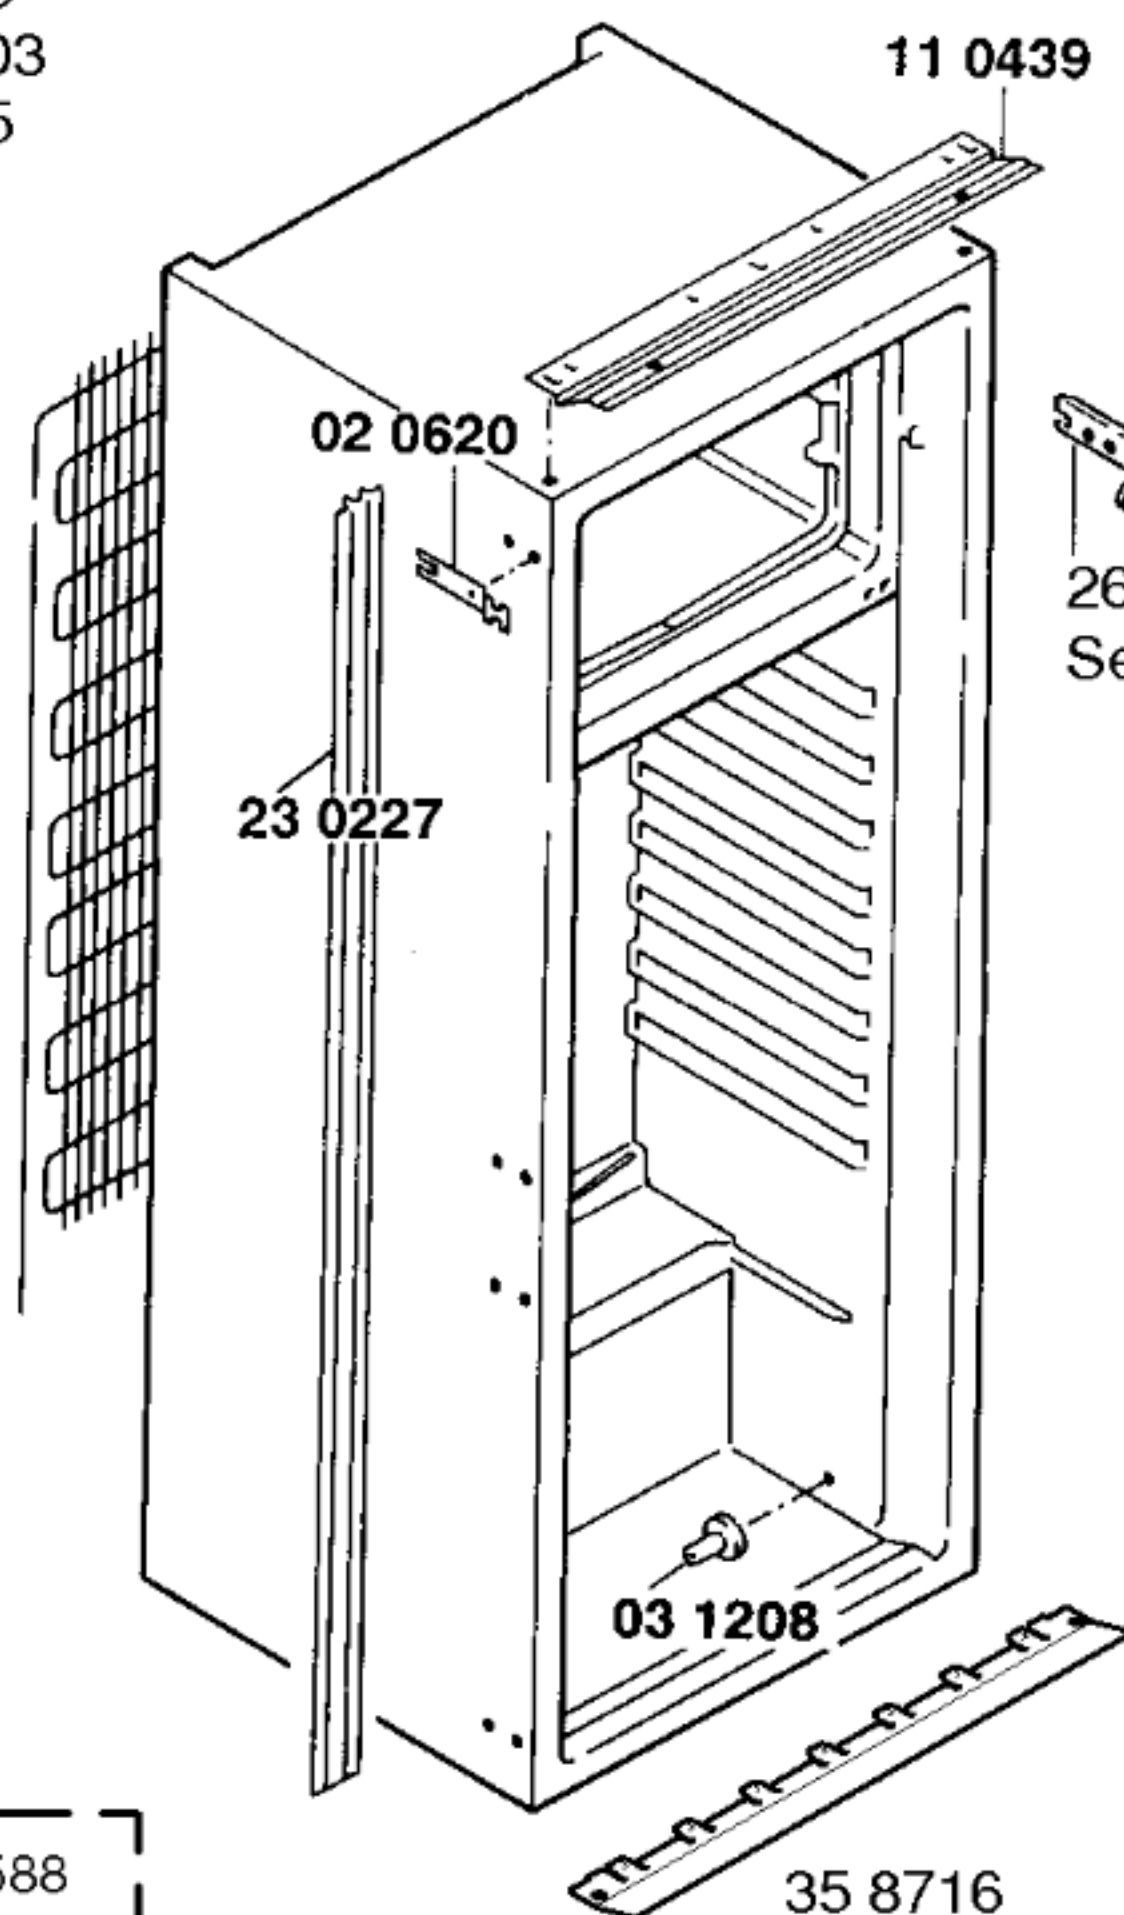

V03

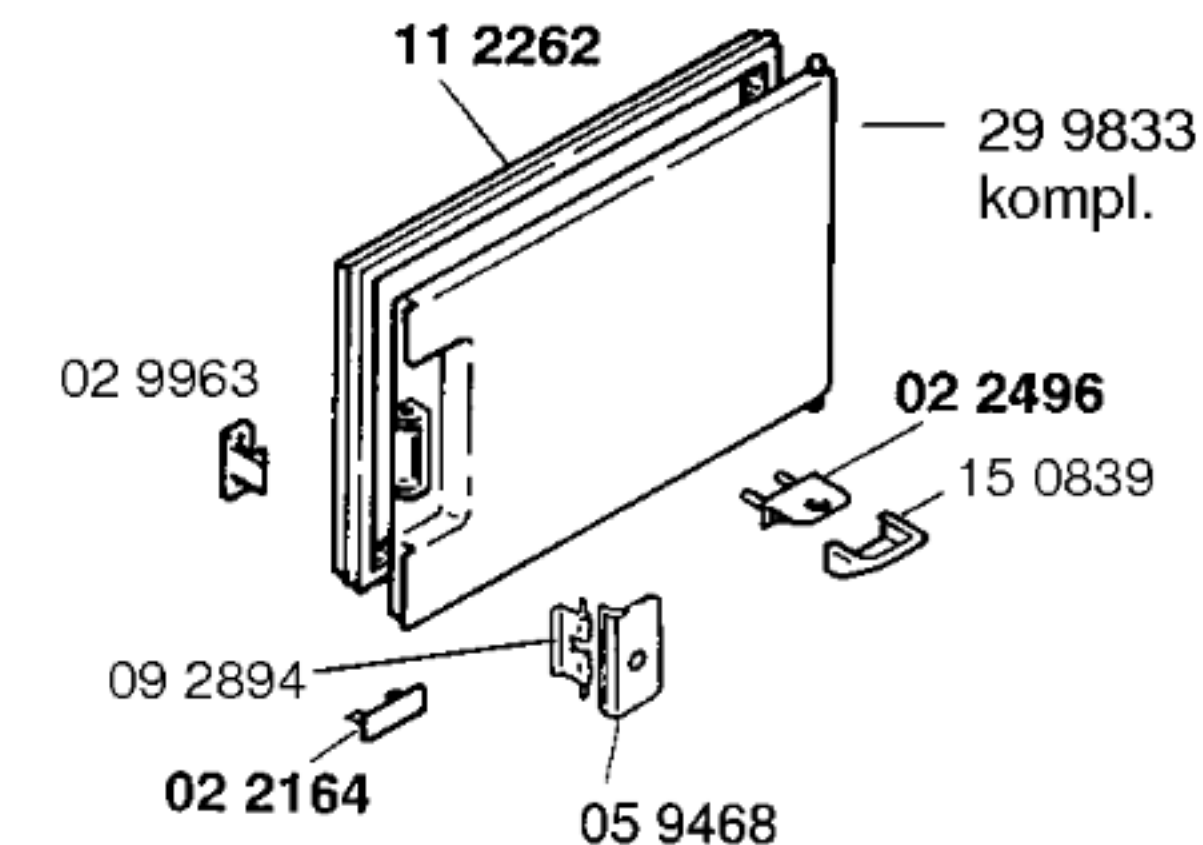

26 8454
V03

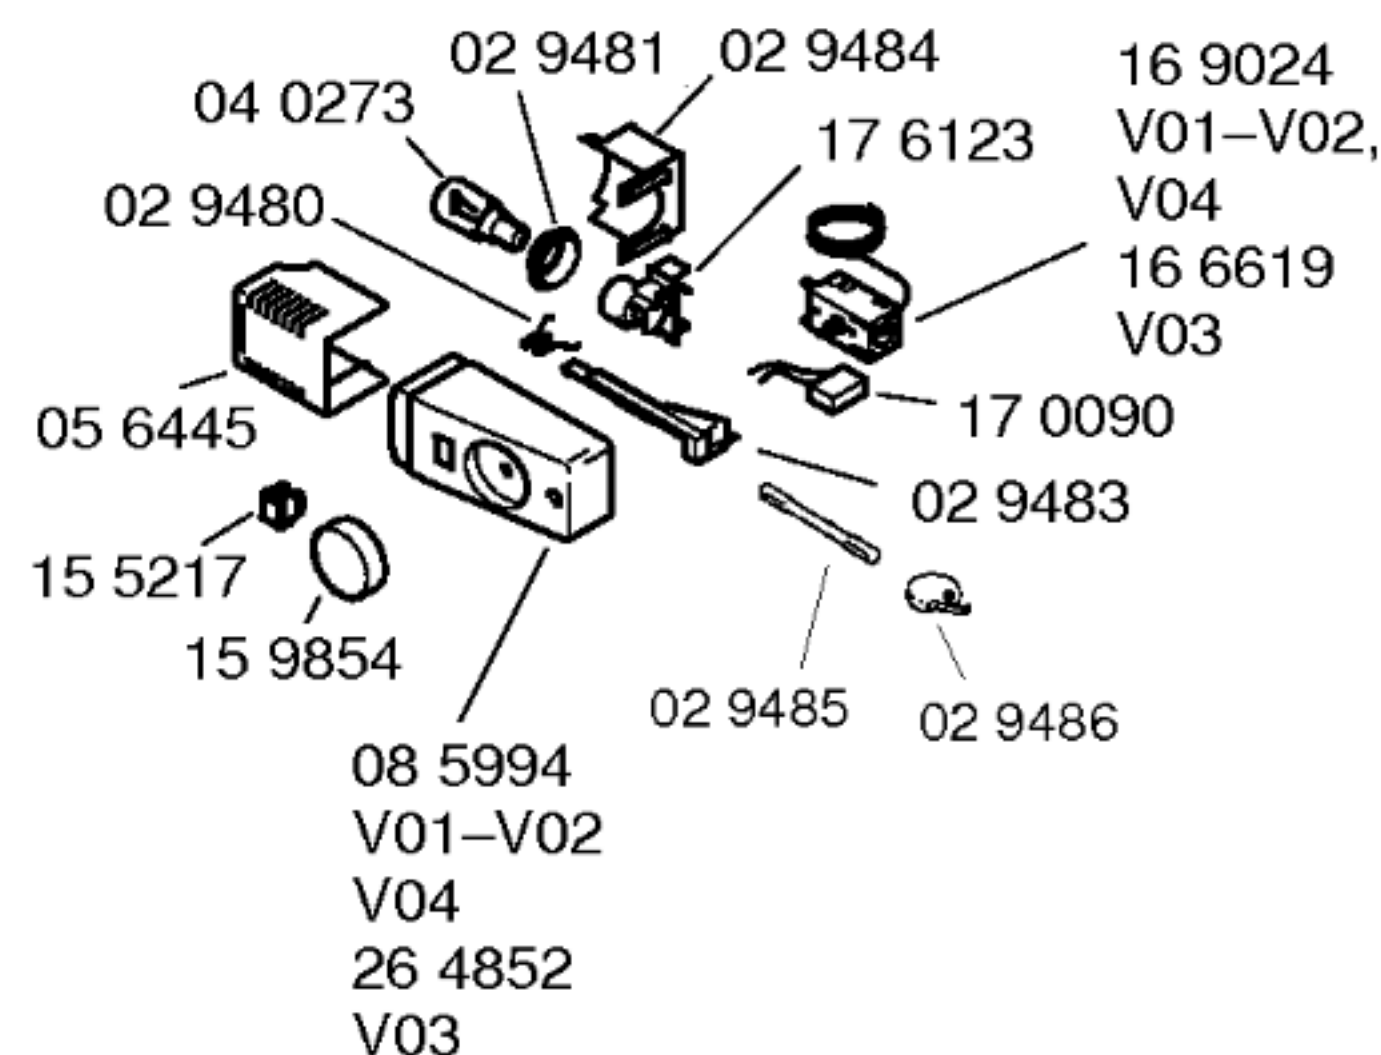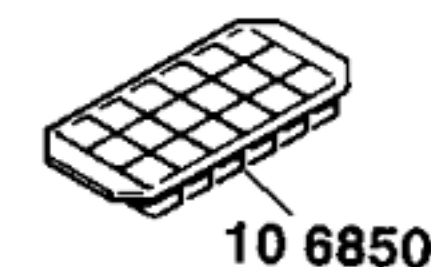


Mat. - Nr. - Konstante
 3740

Gebrauchsanweisung
 52 6154
 (D,GB,F,I,NL,E)


Montageanleitung
 52 6152
 (D,GB,F,I,NL,S,E,N)

Befestigungssatz
 26 8450

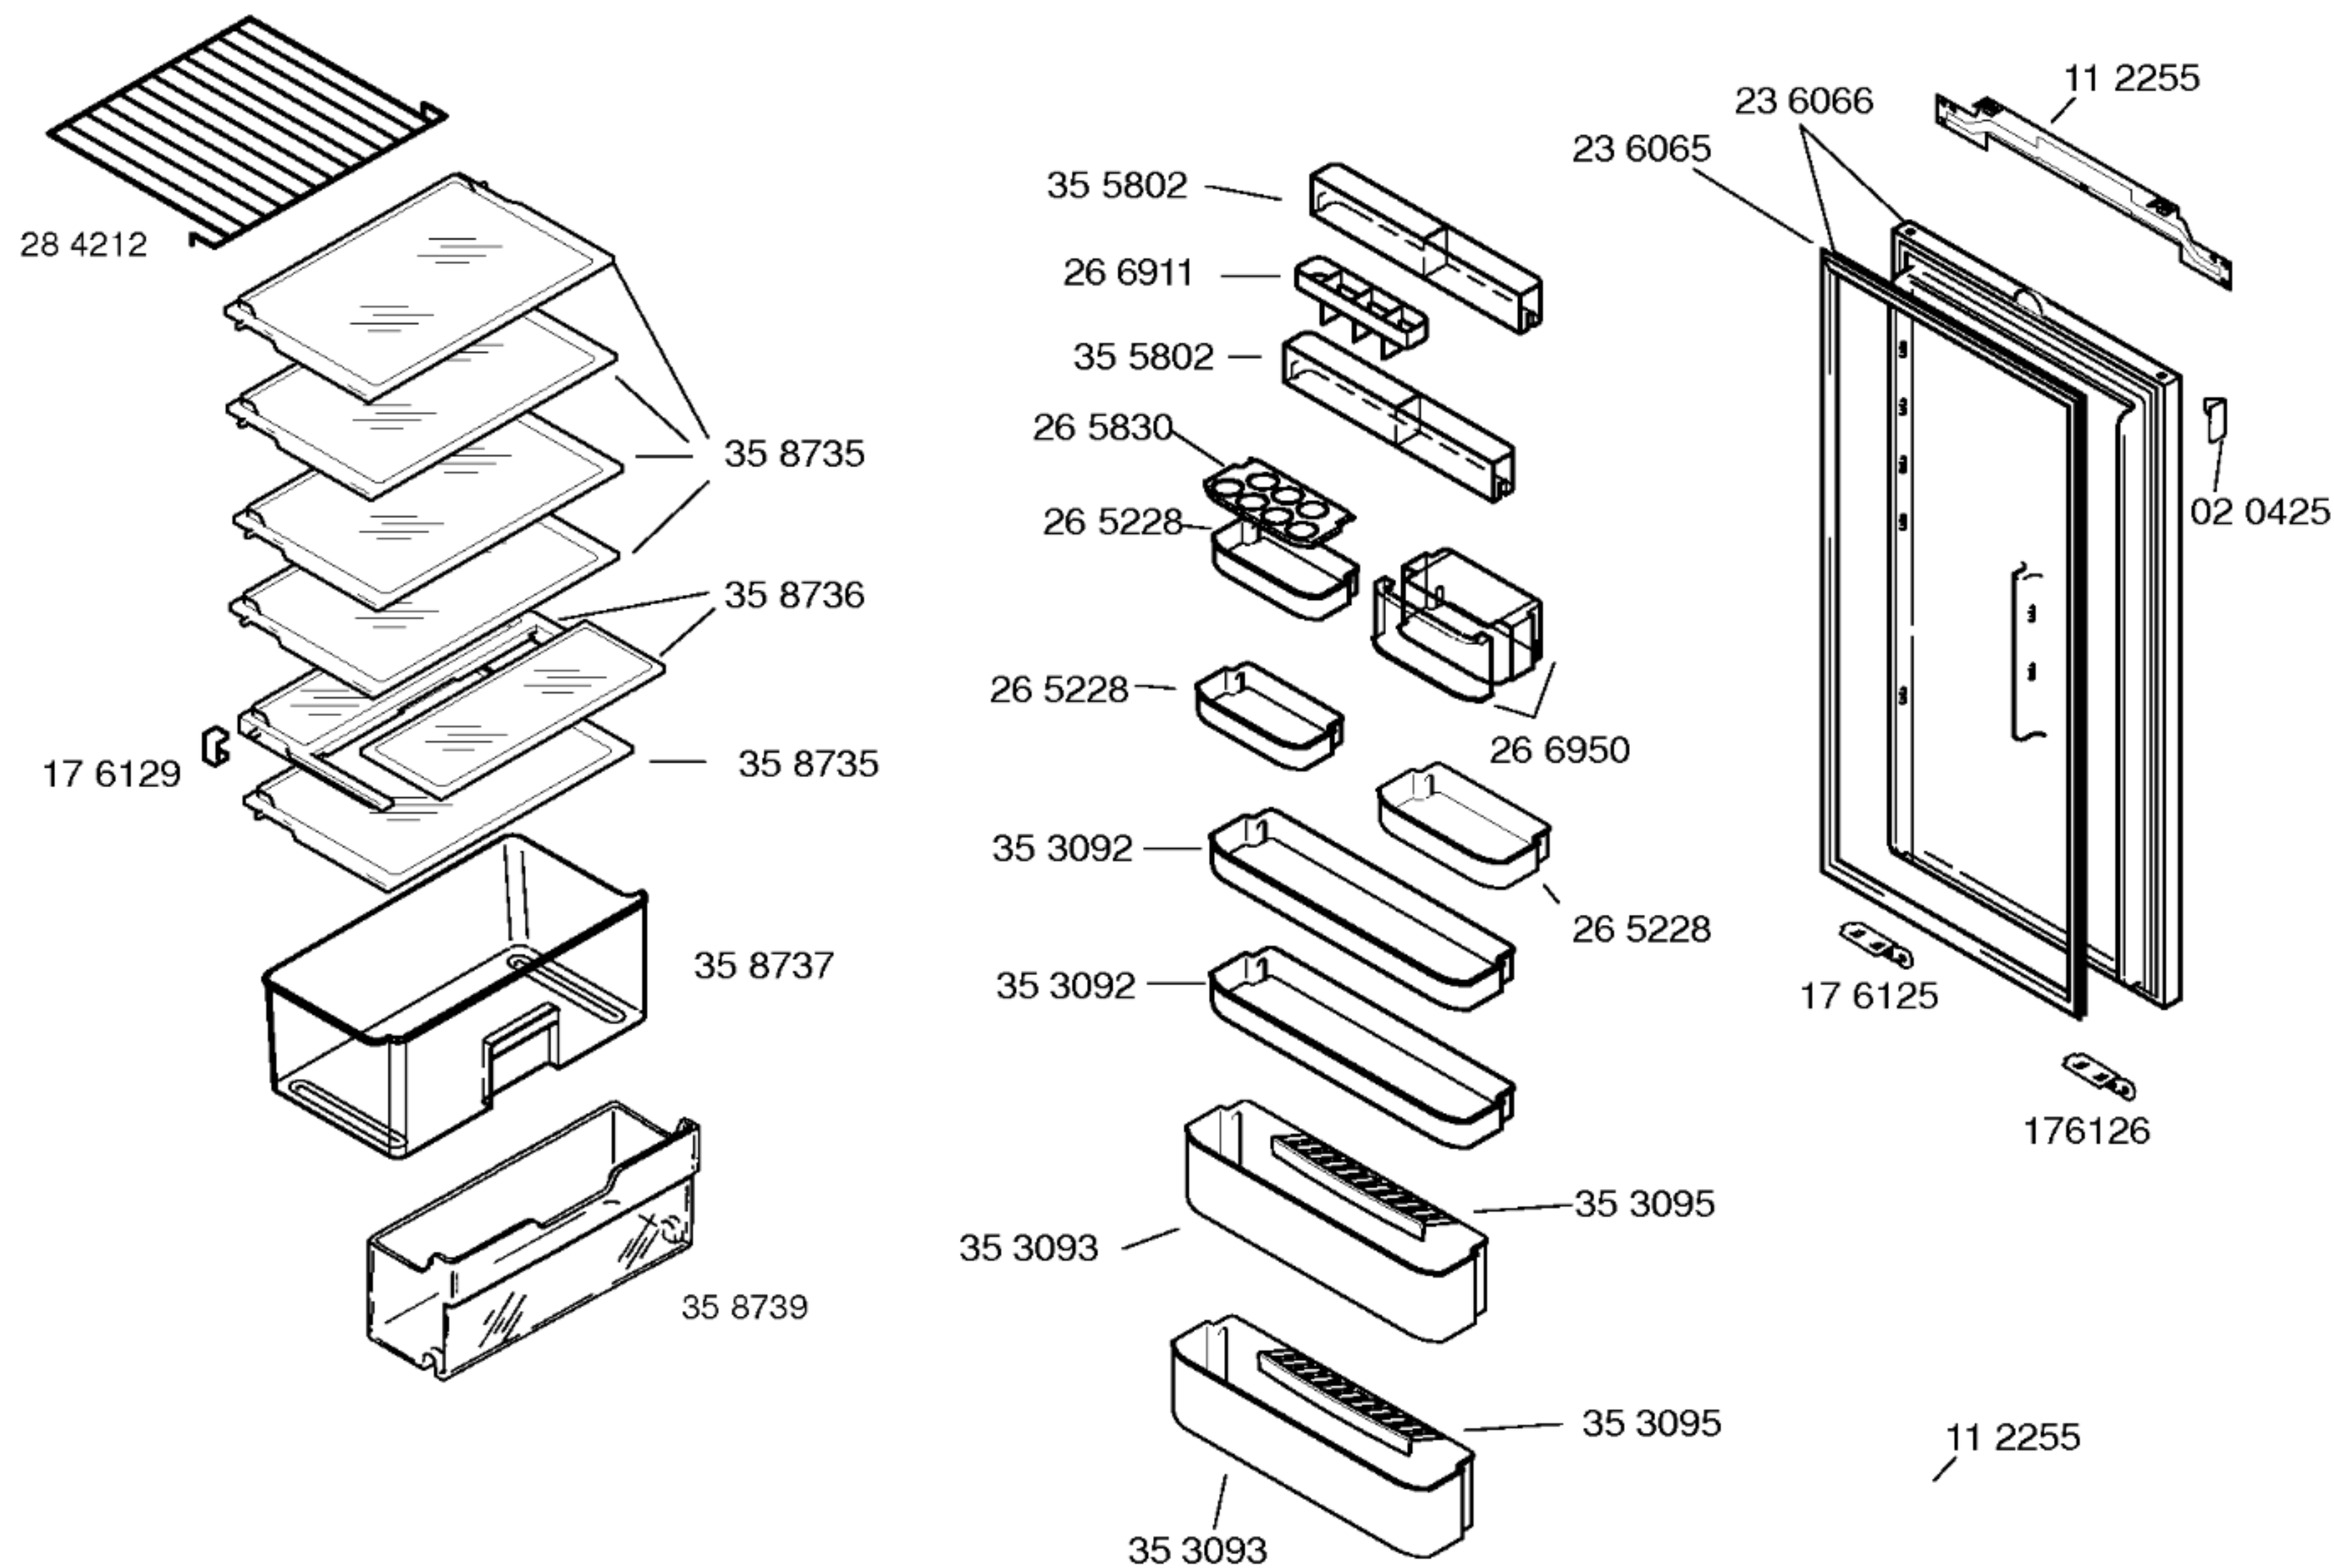

Mat. – Nr. – Konstante
3740

Mat. – Nr. – Konstante
 3740

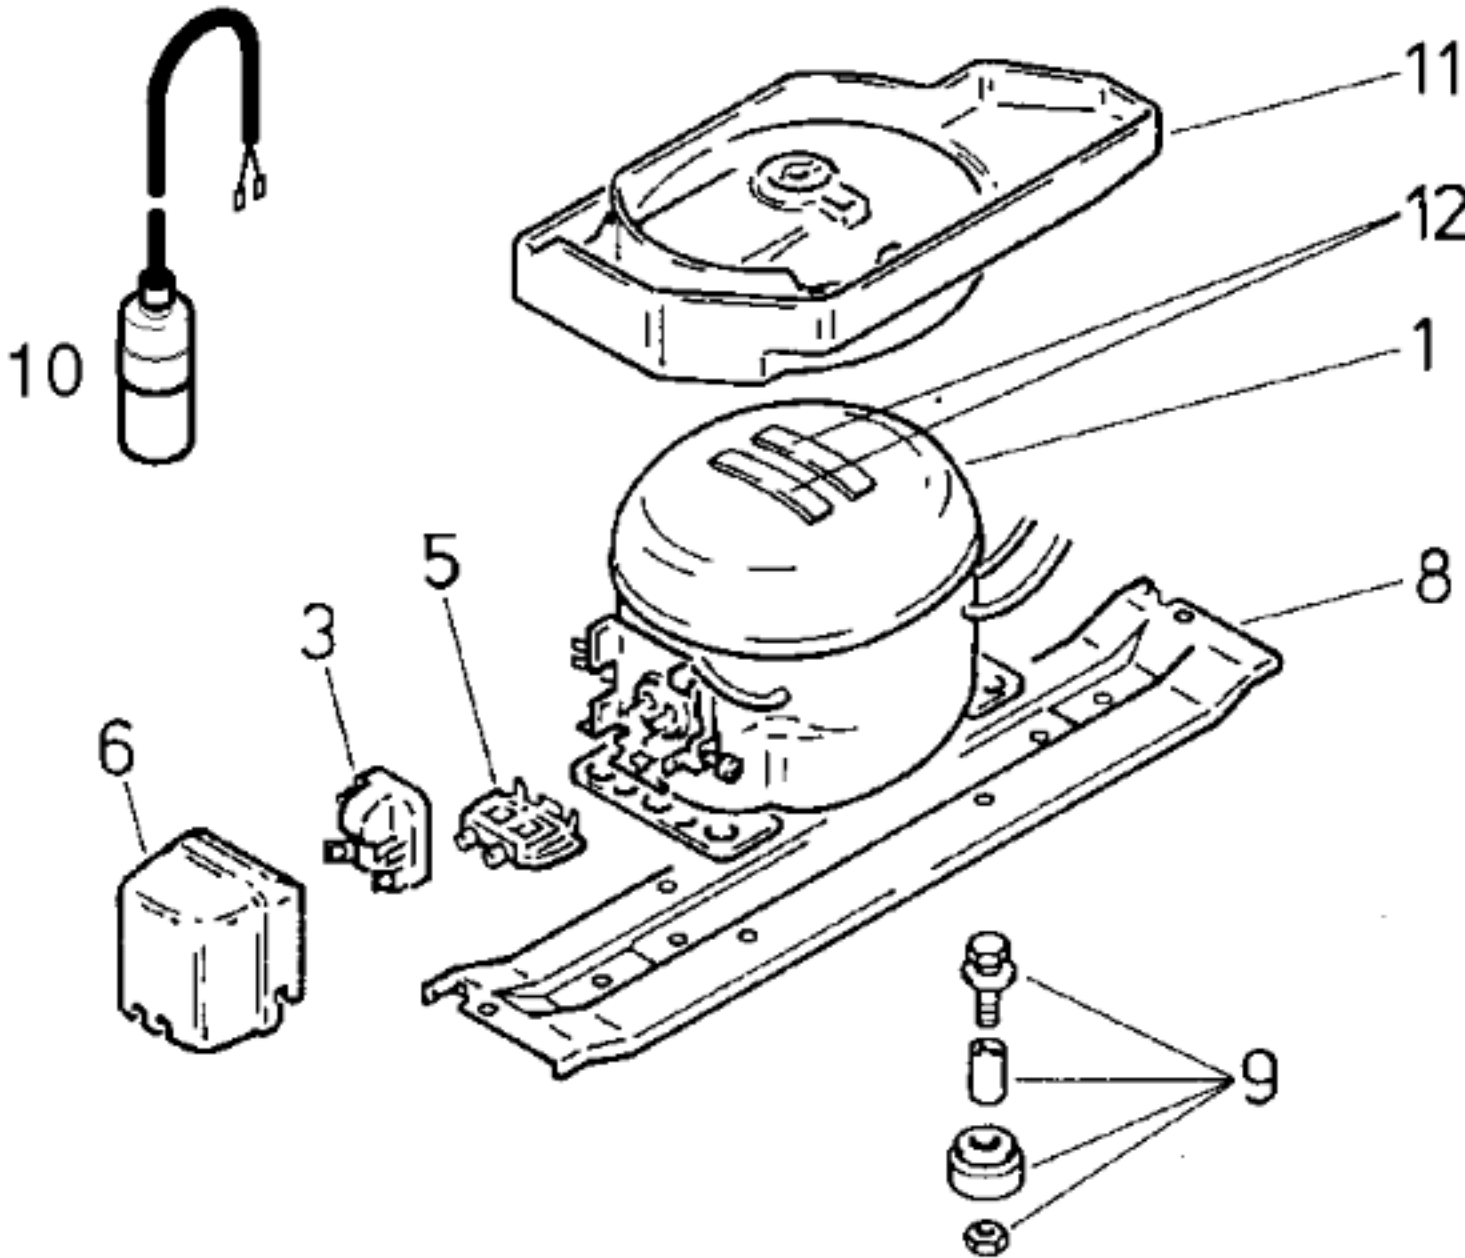

Pos.	V01–V04		
	Danfoss		
	NLE 15 K		
1	14 1752		
2			
3	15 1055		
4			
5	15 0760		
6	15 1072		
7			
8	28 1825		
9	05 0166		
10			
11	48 0594		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		
Typ/Type		NLE 15 K		
Förderleistung/Delivery/Débit	l/h	2637		
Anlaufstrom/Starting current/Cour. de démarrage	A			
Widerstand/Resistance/Résistance	Ha/main/prin. Ω			
	Hi/aux Ω			
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K59		
Reglerstellung/Position		kalt		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	+4,5		
Valeurs de commutation	„aus“	–31,0		
	(„abtauen“ od.) „alarm“	warm +4,5 13,5		
Füllmenge/Fill.quantity/Charge	R600a g	50		
Anschlußwert/Conn.load/Puiss. connectée	W	150		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Resistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			