


**BOSCH**

KS 217 EL	- 0 702 244 405-F3	KS 240 EL	- 0 702 244 416-D6
	- 0 702 244 406-F4		- 0 702 244 417-D7
KS 240 EL	- 0 702 244 407-SK3		- 0 702 244 428-D8
	- 0 702 244 408-SK4		- 0 702 244 429-D9

KÜHLGERÄTE
Kühlschränke, Einbau

Ident-Nummern-Konstante
3740

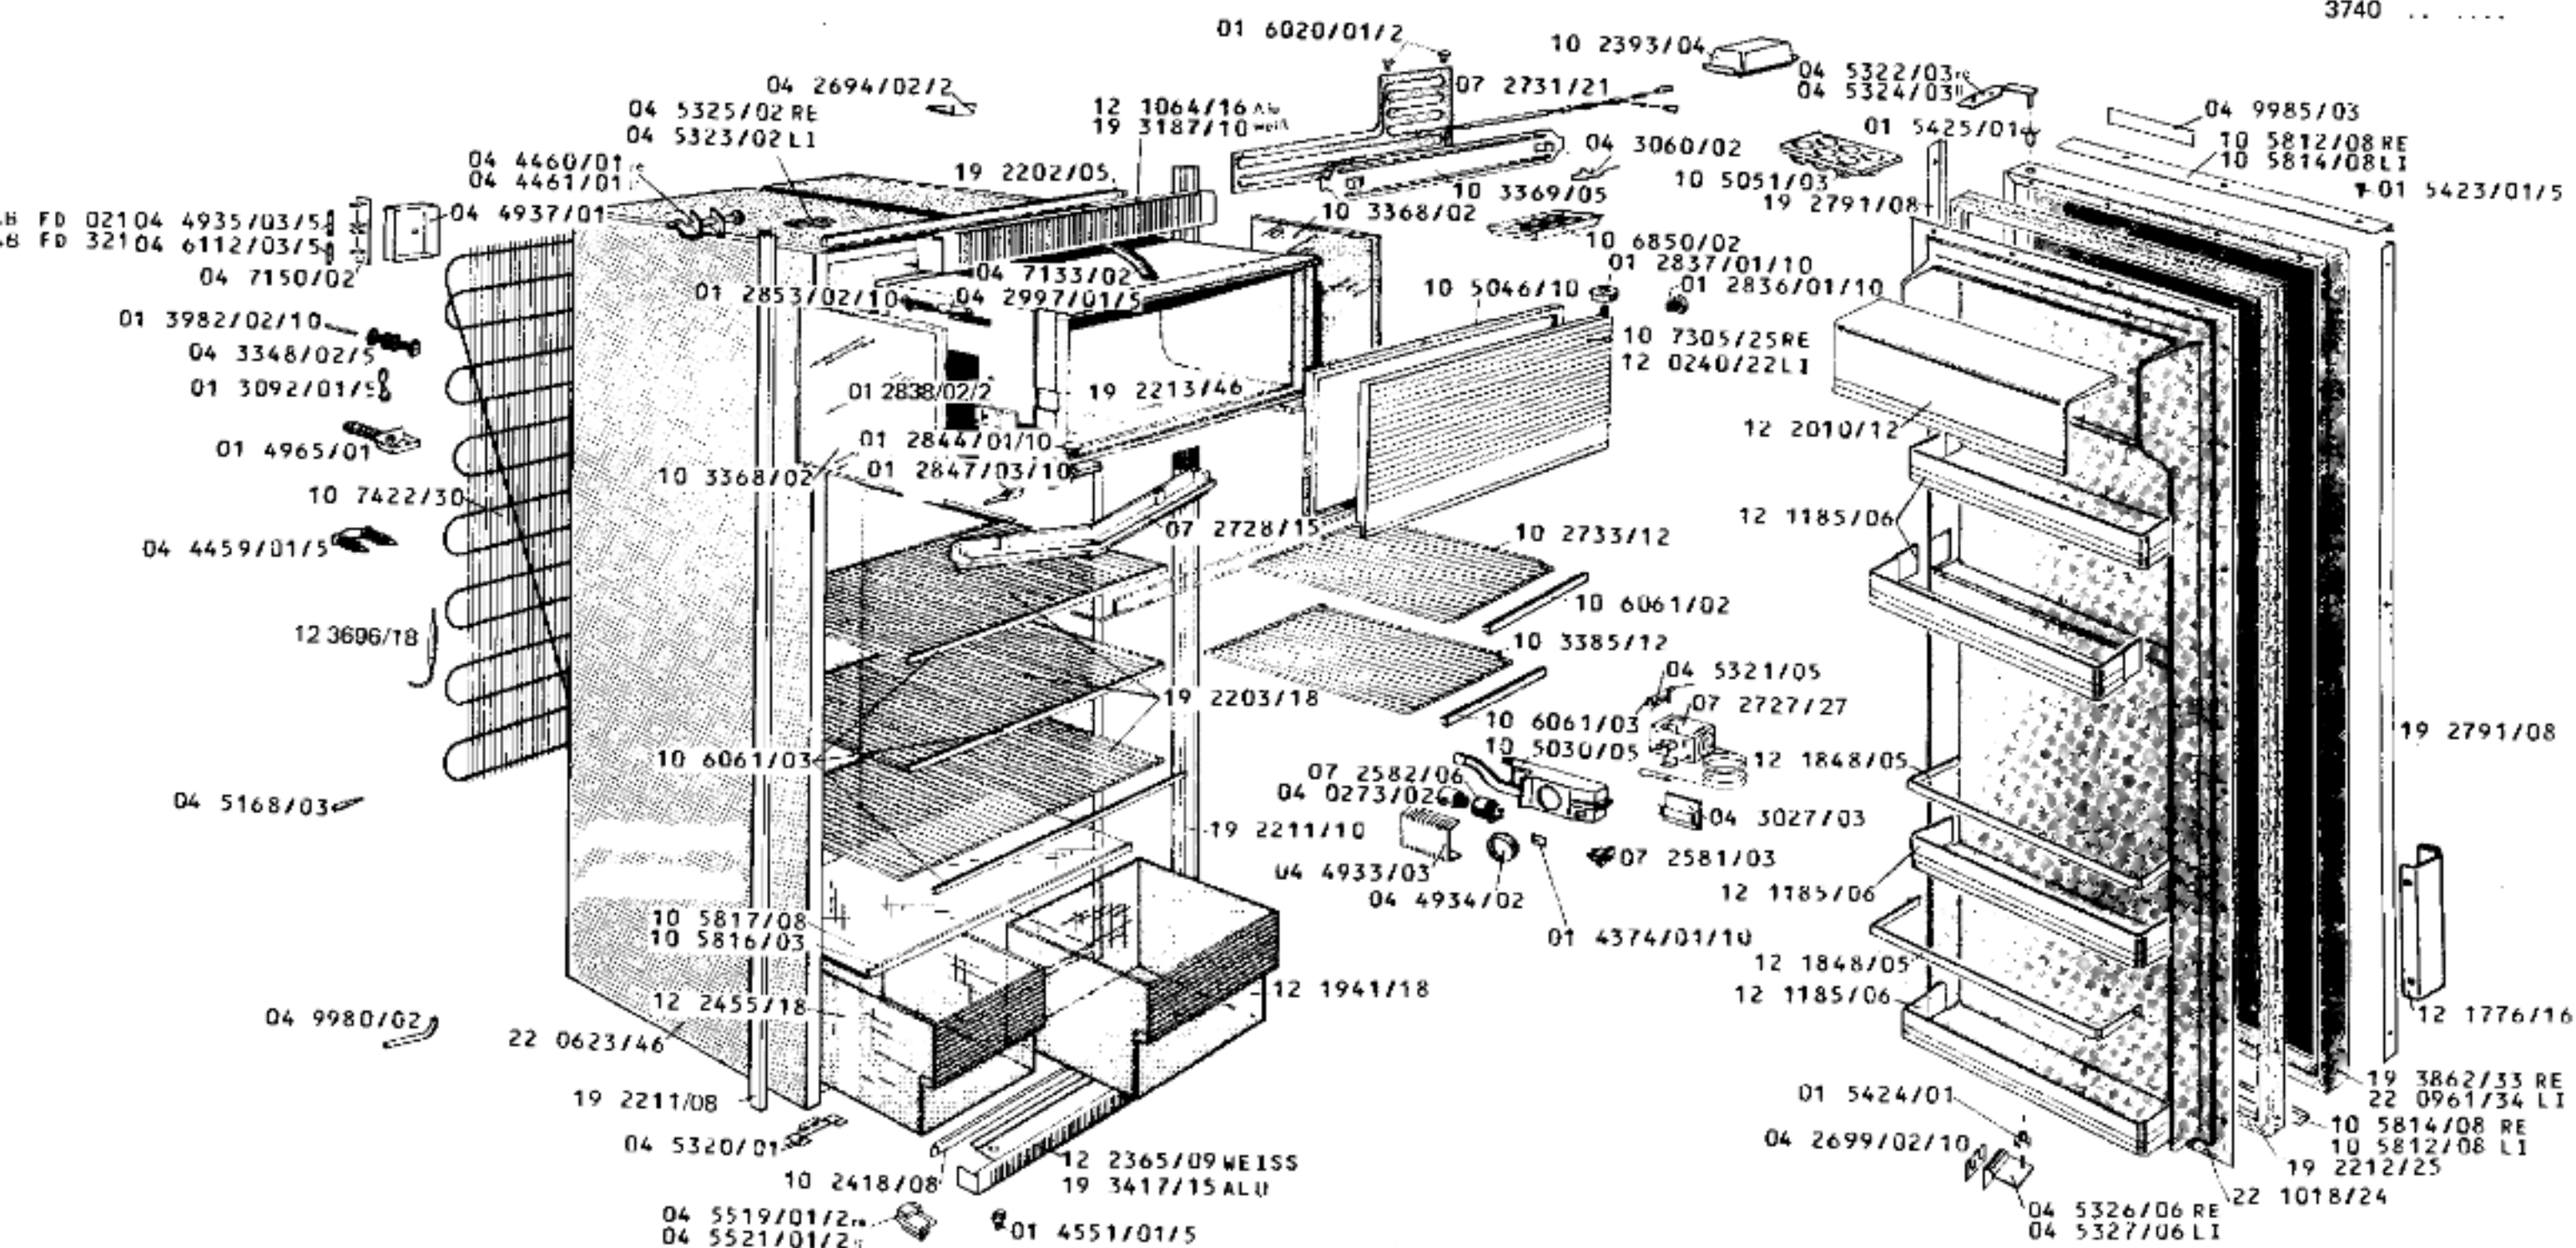


**BOSCH**

KS 217 EL - 0 702 244 405-F3 KS 240 EL - 0 702 244 416-D6
 - 0 702 244 406-F4 - 0 702 244 417-D7
 KS 240 EL - 0 702 244 407-SK3 - 0 702 244 428-D8
 - 0 702 244 408-SK4 - 0 702 244 429-D9

KÜHLGERÄTE
 Kühlschränke, Einbau

Ident.-Nummern-Konstante
 3740

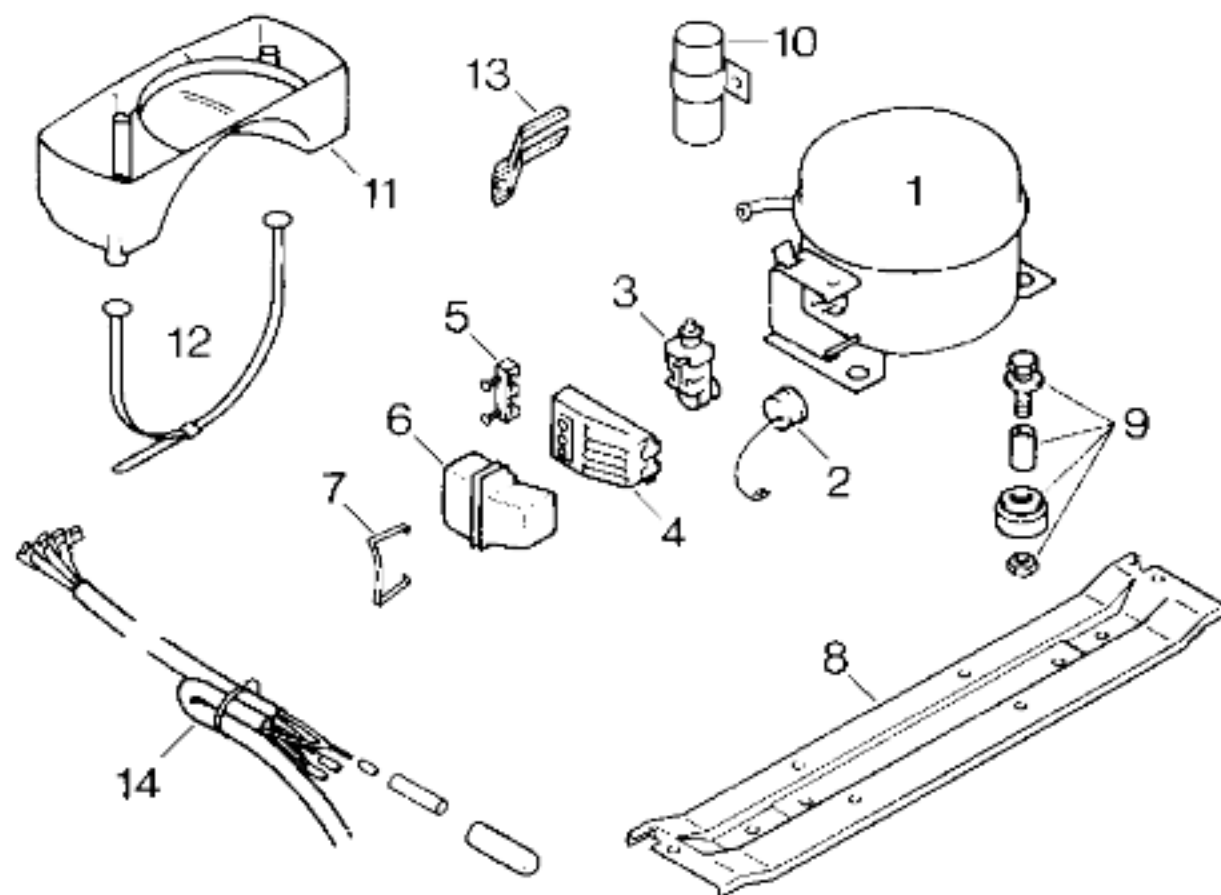

	D8, D9, F3, F4	D8, D9, F3, F4	
Pos.	SK3, SK4	SK3, SK4	D6, D7
	Bosch	Danfoss	Danfoss
1		14 0065/45	
2	07 2131/18		07 1267/22
3	07 2130/18	02 0108/26	07 0262/18
4	04 9757/02		
5		02 1361/04	
6	04 9758/02	05 1413/06	
7			
8		*11 1839/07	
9		*05 0166/05/4	
10			
11	10 6693/03	*11 1243/01	10 5792/06
12			
13		*04 1568/01/2	
14		*05 1226/08	

*) Bei Ersatz des Bosch-Verdichters mitbestellen
 To be ordered when replacing the Bosch compressor
 A commander lors du remplacement du compresseur Bosch

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES

Verdichter/Compressor/Compresseur	Bosch	Danfoss	Danfoss	
Typ/Type	V 1040	TL 5 A	PW 1,5 K 9	
Förderleistung/Delivery/Débit	l/h	1040	920	345
Anlaufstrom/Starting current/Cour. de démarrage	A	9,5	9	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	15,0	15,7	11,5
	Hi/aux Ω	29,5	18,8	44,3
Temp. Regler/Thermostat	Ranco			
Typ/Type	A 59			
Reglerstellung/Position	kalt warm			
Schaltwerte/Switching values/	+ 4 + 4			
Valeurs de commutation	- 29 - 20			
(„abtauen“ od.)	„alarm“			
Füllmenge/Fill.quantity/Charge	R12	g	130	
Anschlußwert/Conn.load/Puiss. connectée	W	115		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω	3230		
Leistung/Power/Puissance	W	15		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			